

Valores acústicos

NATURALLY DRAWN / Drawing in Ink / Hand Sketched / Hand Sketched Transition / Watercolour Lesson



Absorción del sonido (ISO 354)


Impacto del sonido (ISO 140-8 / ISO 10140-3)

Naturally Drawn Almohadillado α_w 0.25 Clase E

Naturally Drawn Almohadillado ΔL_w 31dB

Coefficiente de absorción del sonido Alpha α_s

Frecuencia (Hz)	Almohadillado α_s
100	0.03
125	0.01
160	0.04
200	0.02
250	0.07
315	0.09
400	0.28
500	0.59
630	0.29
800	0.21
1000	0.18
1250	0.19
1600	0.23
2000	0.26
2500	0.29
3150	0.33
4000	0.36
5000	0.40

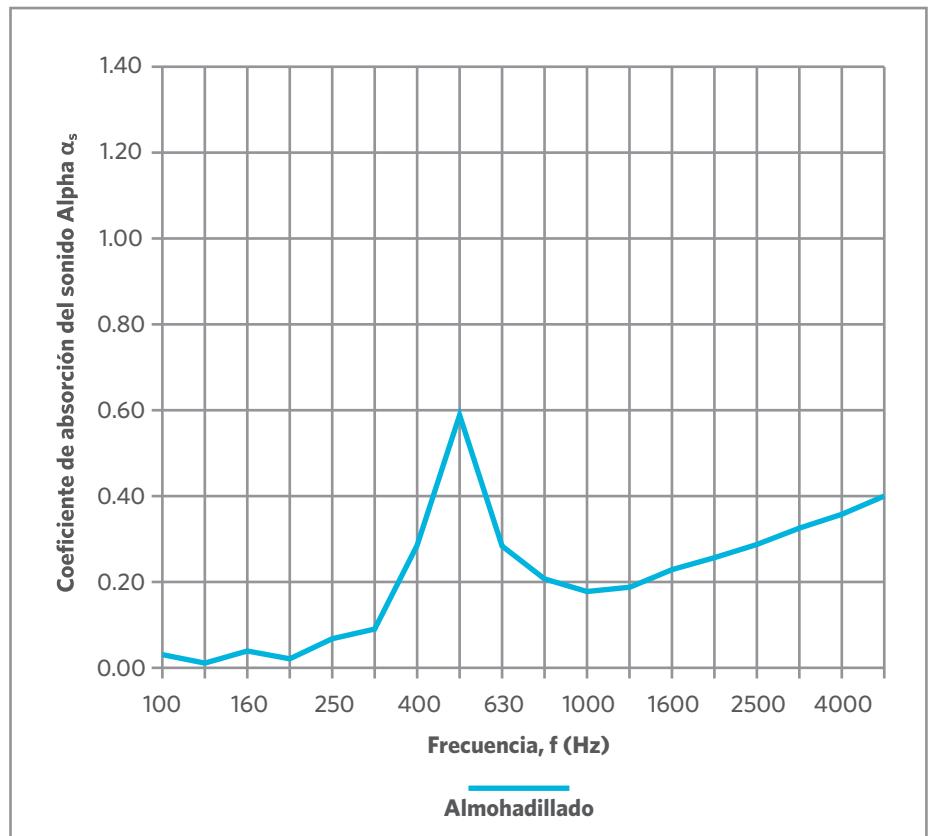

α_p Valores (Almohadillado)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.01	0.07	0.59	0.18	0.26	0.36

α_w	Clase
(valor global) 0.25	E