

Akustische Werte

CONSEQUENCE 2.0 / Effect / Part Two /
React / Sequel / Spin Off / Upshot



Schallabsorptionsgrad (ISO 354)


Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Consequence 2.0 Comfort Plus® Polsterrücken
 α_w 0.30 Klasse D

Consequence 2.0 Comfort Plus® Polsterrücken
 ΔL_w 33dB

Alpha α_s Schallabsorptionsgrad

Frequenz (Hz)	Comfort Plus® Polsterrücken α_s
100	0.03
125	0.03
160	0.02
200	0.04
250	0.07
315	0.15
400	0.41
500	0.42
630	0.29
800	0.26
1000	0.26
1250	0.29
1600	0.32
2000	0.36
2500	0.37
3150	0.42
4000	0.45
5000	0.55

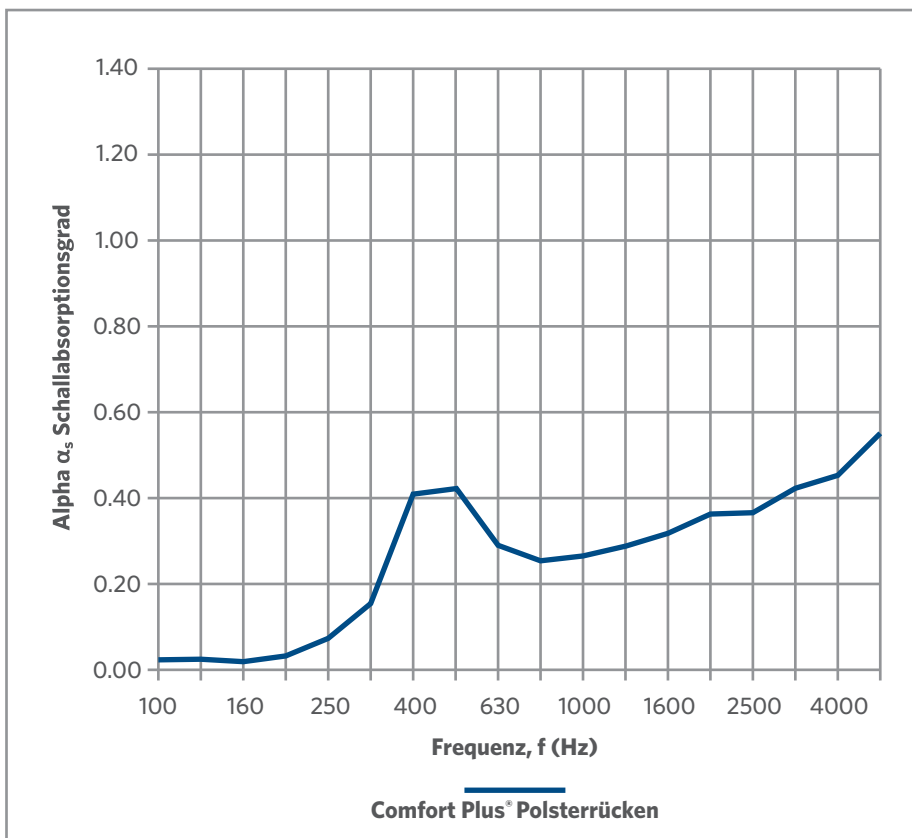

α_p Werte (Comfort Plus® Polsterrücken)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.10	0.40	0.25	0.35	0.50

α_w Klasse

α_w (Gesamtwert)	Klasse
0.30 (H)	D