


Valores acústicos

NORTHWARD BOUND 2.0 /

Firn / Glacier / Snow



Absorción del sonido (ISO 354)


Impacto del sonido (ISO 140-8 / ISO 10140-3)

Northward Bound 2.0 WellBAC® Comfort
 α_w 0.30 Clase D

Northward Bound 2.0 WellBAC® Comfort
 ΔL_w 30dB

Coefficiente de absorción del sonido Alpha α_s

Frecuencia (Hz)	WellBAC® Comfort α_s
100	0.03
125	-0.02
160	0.05
200	0.02
250	0.04
315	0.08
400	0.20
500	0.55
630	0.33
800	0.24
1000	0.23
1250	0.25
1600	0.26
2000	0.29
2500	0.31
3150	0.35
4000	0.39
5000	0.39

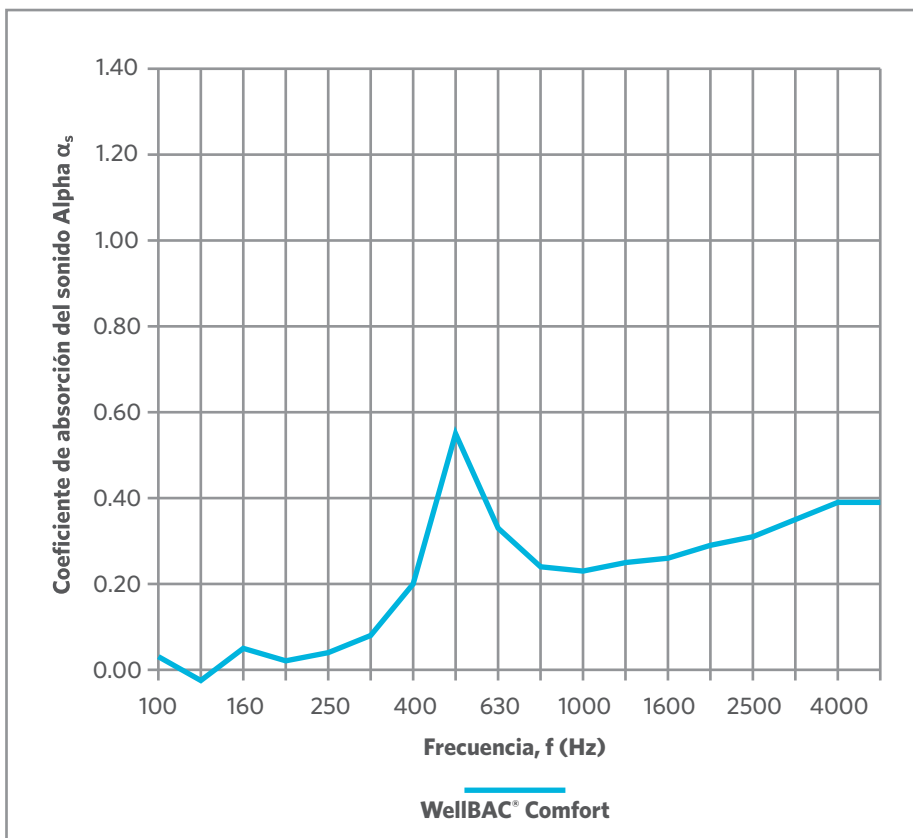

α_{pi} Valores (WellBAC® Comfort)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.35	0.25	0.30	0.40

α_w	Clase
(valor global) 0.30	D