

# Valores acústicos

## UNEXPECTED PURPOSE



### Absorción del sonido (ISO 354)


### Impacto del sonido (ISO 140-8 / ISO 10140-3)

Unexpected Purpose  
Comfort Lite®  $\alpha_w$  0.25 Clase E

Unexpected Purpose  
Comfort Lite®  $\Delta L_w$  28dB

### Coefficiente de absorción del sonido Alpha $\alpha_s$

Frecuencia (Hz)	Comfort Lite® $\alpha_s$
100	0.02
125	0.01
160	0.01
200	0.02
250	0.04
315	0.07
400	0.16
500	0.44
630	0.34
800	0.23
1000	0.21
1250	0.20
1600	0.21
2000	0.24
2500	0.27
3150	0.30
4000	0.33
5000	0.39

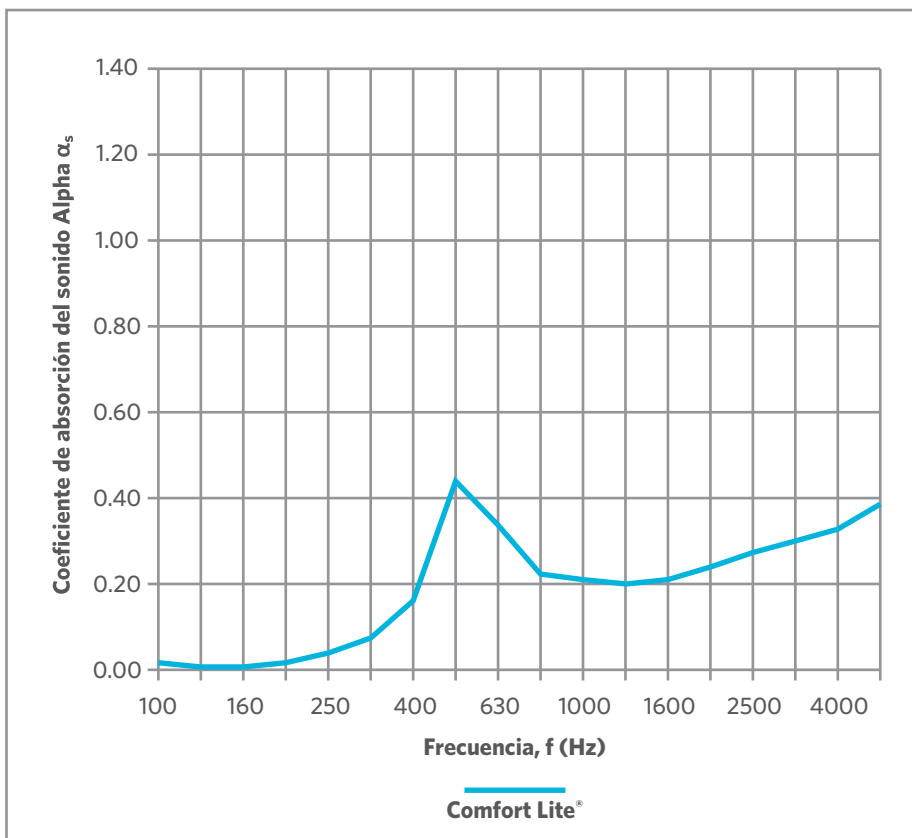

### $\alpha_p$ Valores (Comfort Lite®)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.30	0.20	0.25	0.35

### $\alpha_w$ Clase

$\alpha_w$ (valor global)	Clase
0.25 (H)	E