


# Valeurs acoustiques


## WIREFRAME / WIREFRAME EXPRESSIONS



<b>Absorption des bruits aériens</b> (ISO 354)	<b>Isolation des bruits d'impacts</b> (ISO 140-8 / ISO 10140-3)
Wireframe / Wireframe Expressions Comfort Lite® $\alpha_w$ 0.30 Classe D	Wireframe / Wireframe Expressions Comfort Lite® $\Delta L_w$ 32dB

### Coefficient d'absorption acoustique alpha $\alpha_s$

Fréquence (Hz)	Comfort Lite® $\alpha_s$
100	0.02
125	0.03
160	0.04
200	0.04
250	0.05
315	0.09
400	0.17
500	0.38
630	0.39
800	0.26
1000	0.23
1250	0.24
1600	0.25
2000	0.28
2500	0.30
3150	0.33
4000	0.37
5000	0.40

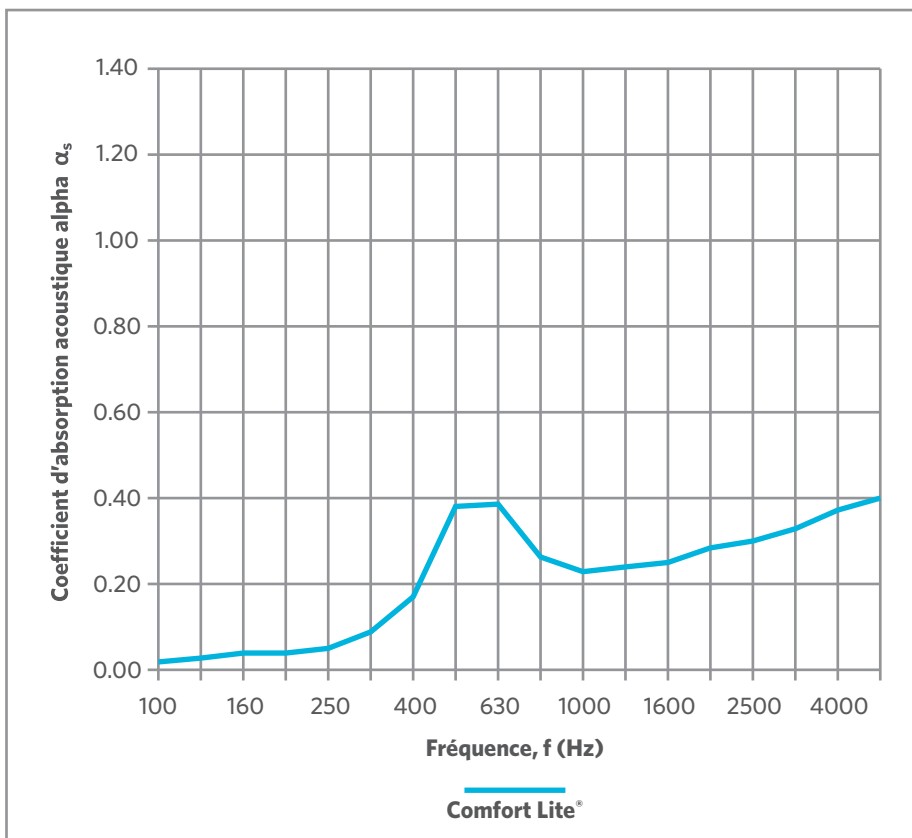

$\alpha_p$ Valeurs (Comfort Lite®)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.05	0.30	0.25	0.30	0.35

$\alpha_w$	Classe
(valeur globale) 0.30	D