
TractionBack® Plus

Milliken



• No primers, no sealants, limited floor prep required

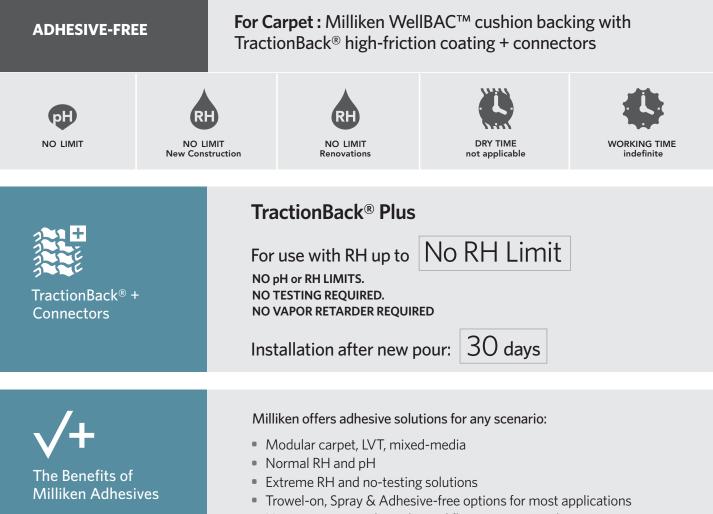

FLOORING TYPE

Modular carpet tile with TractionBack[®] high-friction coating + connectors.

ESTIMATED COVERAGE Connector application rate varies based on installation method and tile size. For details reference chart to the right.

CONNECTOR APPLICATION RATE:

The chart below shows the coverage rate based on 1 box of 500 connectors

	INSTALLATION METHOD		
TILE SIZE	Monolithic/ Quarter-Turn / Multidirectional	Horizontal (Brick) Ashlar / Vertical Ashlar	Herringbone
50cm square	108m2	54m2	n/a
1m square	438m2	230m2	n/a
25cm x 1m plank	108m2	54m2	54m2
50cm x 1m plank	225m2	112m2	112m2


TractionBack[®] Plus

Milliken

Standard Milliken cushion backing with TractionBack[®] high-friction coating + connectors

PRIMARY BENEFITS

A note about our connectors



TractionBack[®] Plus connectors are centered under each corner of the tile, regardless of tile size or installation method.

CONSIDERATIONS FOR THE REAL-WORLD

TractionBack[®] Plus keeps carpet in place, without supplemental adhesives, floor sealers, or primers— and there are NO RH or pH limits

TractionBack[®] Plus combines a proprietary high-friction backing technology (TractionBack[®]) with the addition of connectors (applied separately). With the added connectors there is no longer a need for adhesives at the perimeter in fact, TractionBack[®] Plus requires NO liquid or spray adhesives of any kind.

- NO moisture testing NO RH or pH limits
- Priming and sealing is reduced or eliminated
- Time savings no waiting for adhesives to dry
- TractionBack[®] Plus eliminates the VoCs associated with sealants and adhesives
- Tiles can be lifted and replaced multiple times with no loss of traction effect

Installation benefits of Milliken cushion backing

TractionBack[®] Plus provides the same advantages that come with any Milliken cushion-backed modular product:

- Non-reactive backing greatly reduces floor prep time, and eliminates adhesive failures from plasticizer migration
- Unlike some products with thin thermoplastic backings, the thickness of our cushion will result in virtually no telegraphing
- Industry-best moisture management: TractionBack[®] Plus has NO RH *or* pH limits NO moisture testing is required for ANY install, on-grade or above-grade

TractionBack® and TractionBack® Plus go hand in hand.

The two systems are identical aside from the addition of connectors with TractionBack[®] Plus. This is significant, because it is possible to start with TractionBack[®] and upgrade to TractionBack[®] Plus should unexpected moisture concerns arise during installation.

Or, perhaps TractionBack[®] was specified, but later in the process the use of perimeter adhesives becomes an issue, or it's determined that heavier rolling traffic will be part of the mix. In any of these cases, product already delivered can be used, with only the addition of TractionBack[®] Plus connectors.

Go to millikenfloors.com for complete details.

illiken.