


Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

## **TEST REPORT**

Client :	Milliken (Aus 171 Briens F	stralia) Pty Ltd Road		Test I Issue	Number : Date :	19-00730 15/05/202	-			
	Northmead I			Print		15/05/202				
					r Number :	6701167511				
Sample E	Description	Clients Ref : "Major Frequency 1 (Multi-Colour/Multi - Design)" Tufted loop pile carpet tile Backing: WellBAC Comfort								
		Colour : Multi Colour End Use : Flooring								
		Nominal Composition : 100% I	Nylon							
6/ISO 9239.1-2003		Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source								
				10/10/0	0010					
		Radiant Heat Source Date of Sample Arrival Date Tested		12/12/2 14/05/2						
		Date of Sample Arrival	1			Mean				
		Date of Sample Arrival Date Tested	1 7.1	14/05/2	2020	Mean -	kW/m²			
		Date of Sample Arrival Date Tested CHF Value		14/05/2 2	2020	Mean - 5.8				
		Date of Sample Arrival Date Tested CHF Value Length	7.1	14/05/2 2 -	2020 3 -	-				
		Date of Sample Arrival Date Tested CHF Value Length Width	7.1 5.8	14/05/2 2 - 5.8	2020 3 - 5.8	5.8	kW/m² kW/m² %.min			
		Date of Sample Arrival Date Tested CHF Value Length Width Smoke Value	7.1 5.8 1	14/05/2 2 - 5.8	2020 3 - 5.8 3	5.8	kW/m²			

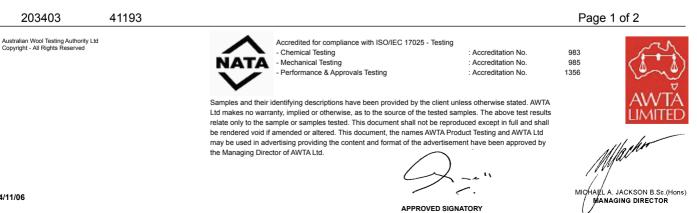

(C)

Α



Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

## **TEST REPORT**

Client :	Milliken (Australia) Pty Ltd	Test Number	:	19-007308
	171 Briens Road	Issue Date	:	15/05/2020
	Northmead NSW 2152	Print Date	:	15/05/2020
		Order Number :		6701167511

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

HF30 not reported as flame out time occurred before 30 minutes.

203403

Australian Wool Testing Authority Ltd Copyright - All Rights Reserved

41193



the Managing Director of AWTA Ltd.

Accredited for compliance with ISO/IEC 17025 - Testing - Chemical Testing - Mechanical Testing - Performance & Approvals Testing

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by

: Accreditation No. : Accreditation No. : Accreditation No.

983 985 1356

Page 2 of 2

AWTA



APPROVED SIGNATORY

C