

Valeurs acoustiques

UNEXPECTED PURPOSE



Absorption des bruits aériens (ISO 354)


Isolation des bruits d'impacts (ISO 140-8 / ISO 10140-3)

Unexpected Purpose
Comfort Lite® α_w 0.25 Classe E

Unexpected Purpose
Comfort Lite® ΔL_w 28dB

Coefficient d'absorption acoustique alpha α_s

Fréquence (Hz)	Comfort Lite® α_s
100	0.02
125	0.01
160	0.01
200	0.02
250	0.04
315	0.07
400	0.16
500	0.44
630	0.34
800	0.23
1000	0.21
1250	0.20
1600	0.21
2000	0.24
2500	0.27
3150	0.30
4000	0.33
5000	0.39

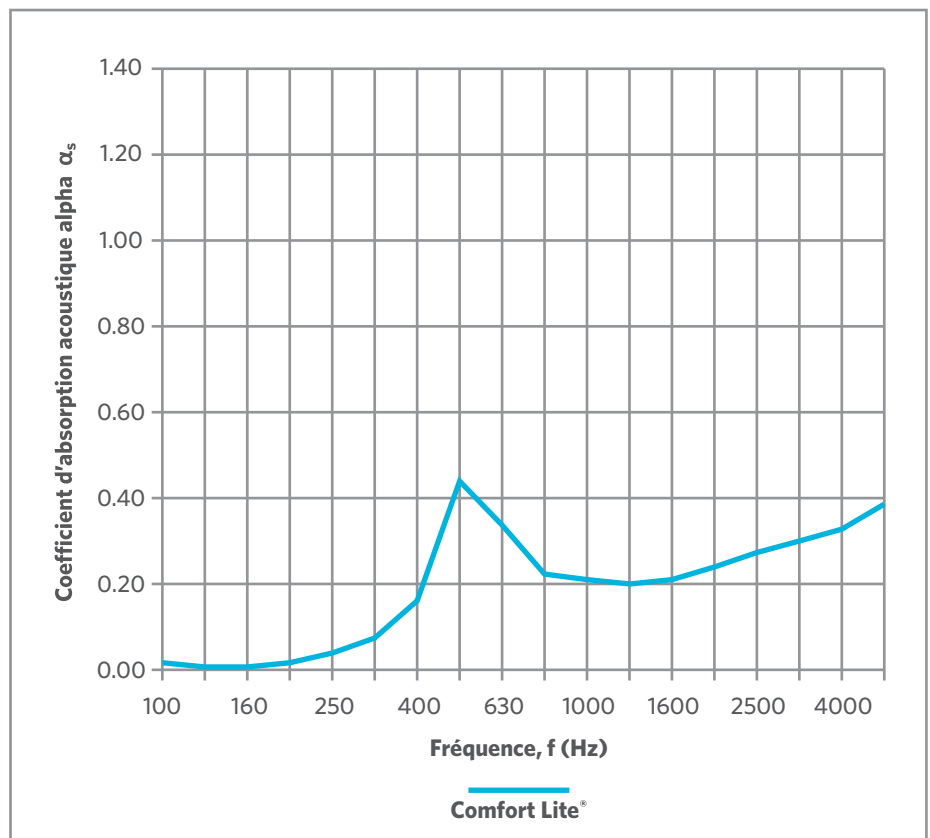

α_p Valeurs (Comfort Lite®)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.30	0.20	0.25	0.35

α_w	Classe
(valeur globale)	
0.25 (H)	E