

Akustische Werte

PATTERN PLAY



Schallabsorptionsgrad (ISO 354)


Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Pattern Play WellBAC® Comfort
 α_w 0.30 Klasse D

Pattern Play WellBAC® Comfort
 ΔL_w 31dB

Alpha α_s Schallabsorptionsgrad

Frequenz (Hz)	WellBAC® Comfort α_s
100	0.00
125	0.02
160	0.01
200	0.04
250	0.04
315	0.09
400	0.19
500	0.51
630	0.35
800	0.25
1000	0.23
1250	0.25
1600	0.28
2000	0.30
2500	0.31
3150	0.36
4000	0.38
5000	0.45

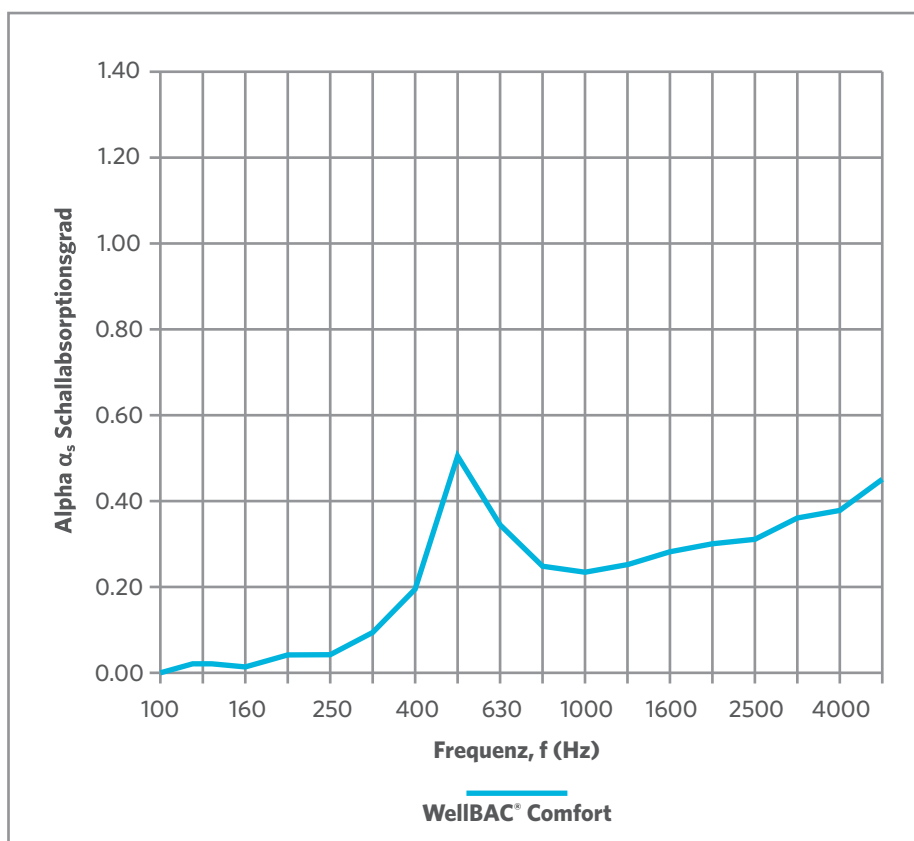

α_p Werte (WellBAC® Comfort)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.35	0.25	0.30	0.40

α_w	Klasse
(Gesamtwert)	
0.30	D