

Akustische Werte

ARCTIC SURVEY / Expedition / Isotherm / Shackleton



Schallabsorptionsgrad (ISO 354)


Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Arctic Survey Comfort Plus® Polsterrücken
 α_w 0.30 Klasse D (H)

Arctic Survey Comfort Plus® Polsterrücken
 ΔL_w 36dB

Alpha α_s Schallabsorptionsgrad

Frequenz (Hz)	Comfort Plus® Polsterrücken α_s
100	0.04
125	0.04
160	0.02
200	0.05
250	0.09
315	0.19
400	0.56
500	0.30
630	0.21
800	0.21
1000	0.22
1250	0.26
1600	0.31
2000	0.35
2500	0.40
3150	0.43
4000	0.48
5000	0.54

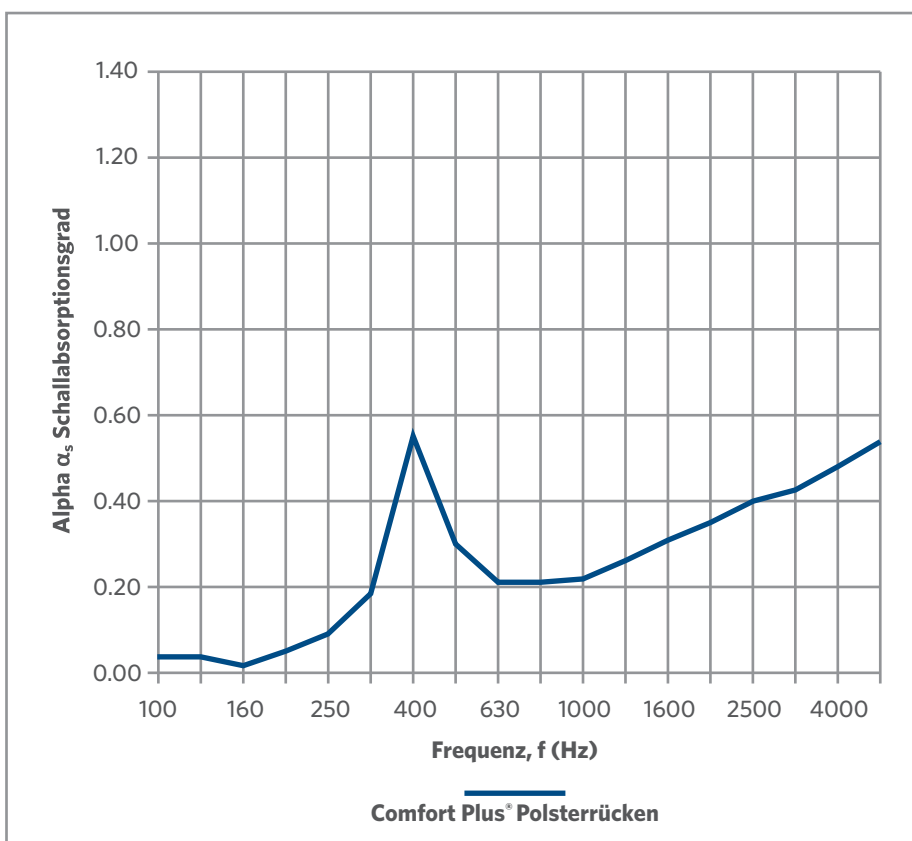

α_p Werte (Comfort Plus® Polsterrücken)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.10	0.35	0.25	0.35	0.50

α_w Klasse

α_w (Gesamtwert)	Klasse
0.30	D (H)