


Valeurs acoustiques


NATURALLY DRAWN / Drawing in Ink / Hand Sketched / Hand Sketched Transition / Watercolour Lesson



Absorption des bruits aériens (ISO 354)	Isolation des bruits d'impacts (ISO 140-8 / ISO 10140-3)
Naturally Drawn Mousse α_w 0.25 Classe E	Naturally Drawn Mousse ΔL_w 31dB

Coefficient d'absorption acoustique alpha α_s

Fréquence (Hz)	Mousse α_s
100	0.03
125	0.01
160	0.04
200	0.02
250	0.07
315	0.09
400	0.28
500	0.59
630	0.29
800	0.21
1000	0.18
1250	0.19
1600	0.23
2000	0.26
2500	0.29
3150	0.33
4000	0.36
5000	0.40

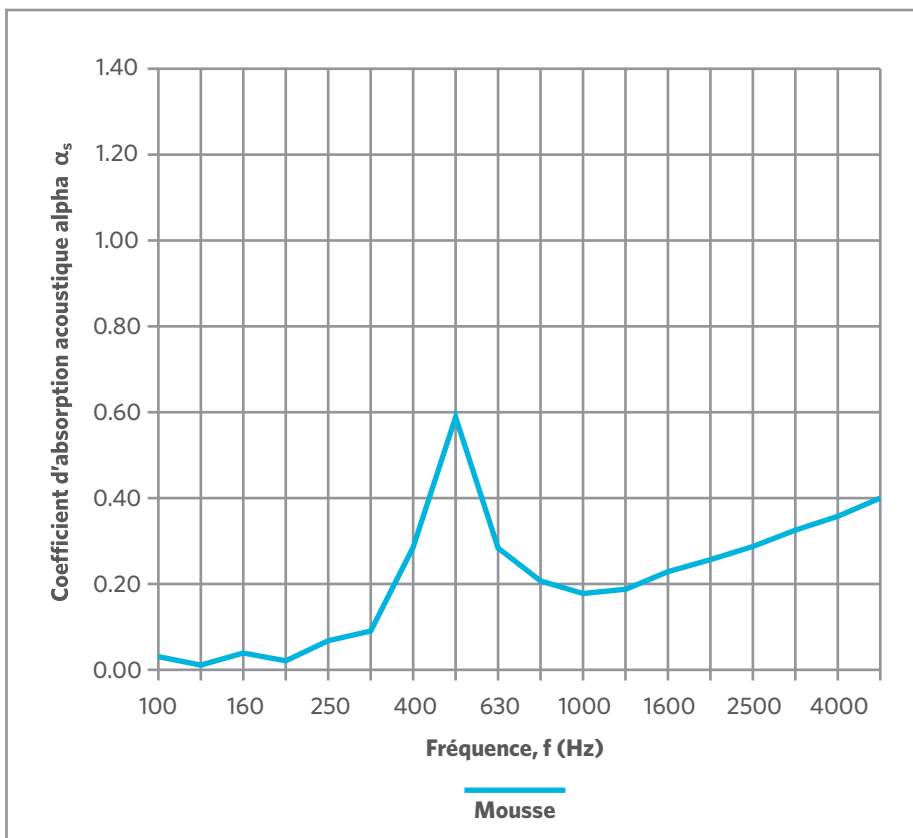

α_p Valeurs (Mousse)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.01	0.07	0.59	0.18	0.26	0.36

α_w	Classe
(valeur globale) 0.25	E