


PRIMA

RIGIDFORM™ LVT

Embrace an elevated, natural aesthetic that seamlessly blends form and function.

Prima rigid flooring is inspired by hues and textures found in nature, combined with resilient construction that performs beautifully. Precision embossing enhances the graining for a more natural look and feel. Embodying a hardwood aesthetic, each color is available in 2 plank sizes and serves as the foundation of upscale hospitality interiors.

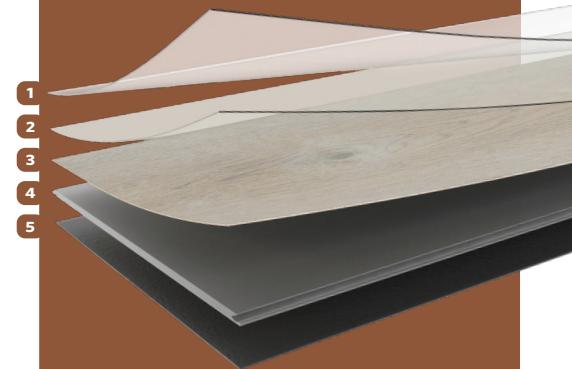

1 PROGUARD™ REINFORCED POLYURETHANE

Provides superior stain and scratch resistance, and eliminates the need for polishes and waxes allowing reduced maintenance costs and improved IAQ.

2 HEAVY COMMERCIAL WEAR LAYER

Transparent embossed 0.55 mm wear layer provides protection and appearance retention in demanding commercial environments.

3 PRINTED LAYER

High-resolution printed film delivers stunning realistic visuals of wood and stone.

4 INTERLOCKING RIGID LAYER

This stable layer provides unsurpassed durability that also hides subfloor imperfections, with a locking mechanism that allows for quick and easy adhesive-free installation.

5 INTEGRAL ACOUSTIC BACKING

Pre-attached underlayment minimizes sound, is shock absorbent, and further assists with concealment of subfloor imperfections.



SCHEME: MERLOT

TAG: RF-01

PRODUCT: CLASSIC CHAMPION

9" x 60": CLL98

SCHEME: MATCHA

TAG: RF-01

PRODUCT: CLASSIC EXQUISITE

9" x 60": CLL143



 **LivSmart**
Studios
by Hilton™



PRIMA

Classic

RIGIDFORM™ LVT

Construction

High Performance
Rigid Core Plank

Weight Per Box

9.13" x 60.31": 47.0 lb
(21.32 kg)

Finish

ProGuard™ Coating

Quantity Per Box

9.13" x 60.31":
26.78 sf (2.49 m²)

Wear Layer Thickness

22 mil (0.55 mm)

Warranties

15 - Year Limited
Commercial Wear

Overall Thickness

5.0 mm

20 - Year Limited

Light - Multifamily
Units & Hospitality
Rooms Only

Edge Profile

Micro Bevel, with
secure locking
mechanism

1 - Year Manufacturing

Defect Warranty

Nominal Plank Sizes

9" x 60"
(232 mm x 1,532 mm)

Recommended

Installation Method

Pieces Per Box

9.13" x 60.3": 7



RANDOM

SUSTAINABLE FEATURES

Milliken LVT is durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics.

Milliken LVT meets many environmental standards, including FloorScore® certified, Prop 65 Free and Ortho-Phthalate Free, Certified EPD, and Declare.



Declare.

M/PACT™
CARBON NEUTRAL PROGRAM

FEATURED:

(Front) Classic in Exquisite CLL143. 9" x 60" planks.
Random ashlar. (Back) Classic in Champion CLL98.
9" x 60" planks. Random ashlar.

* Images show approximate color and pattern scale.
Please use actual samples to make your final
selections.