

LVT GLUEDOWN INSTALLATION INSTRUCTIONS



All instructions and recommendations are based on the most recent information available. They should be followed for high-quality installation. Visit our website at www.millikenfloors.com for the latest information and installation instructions. Contact Milliken Technical support if there are any specific concerns prior to installation. <https://floors.milliken.com/floors/en-my/home>



Milliken Luxury Vinyl Tile is designed to be installed by direct glue to the floor substrate. For a quality installation follow the instructions carefully and use approved adhesives, subfloor preparation materials, and methods.

Before you start:

Order all tiles for the flooring project at the same time. Compatibility of tiles in repeat orders cannot be guaranteed and batches should not be mixed within one space.

Storage and Acclimatization

1. Handle, store, and transport LVT carefully to avoid product distortions. Store and transport boxes of tile / plank on a flat surface, stacked neatly up to 5 boxes high. Never store upright or on side. Do not allow boxes to bend during storage or transportation. Avoid exposure to extreme temperature or humidity conditions.
2. Acclimatize product to site conditions by delivering all materials, including adhesives and sub floor products, to the job site at least 48 hours prior to installation. Store all products at 18° to 29°C for 48 hours prior to installation.
3. The space where flooring is to be installed shall be fully enclosed with the permanent HVAC system operational prior to installing flooring. The temperature shall be 18° to 29°C for 48 hours before installation, during installation and after installation. The temperature of the space shall be kept at a minimum 10°C continually after installation.

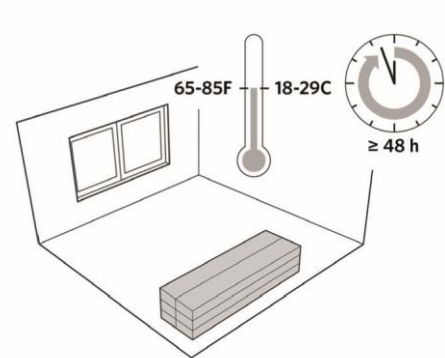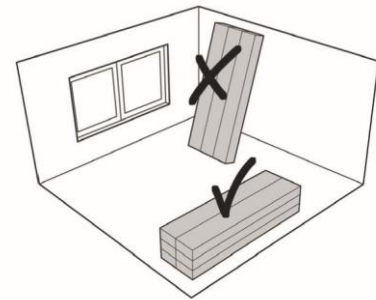

Subfloor

To prevent adhesion problems, make sure that the subfloor is flat (no more than 3mm variance within 2 meters), smooth, clean (including free from fat, grease, chemical substances, mould, salts, etc.), sound, stable and dry. The floor should be prepared in accordance with BS8203 or equivalent national standard.

The type of subfloor, its quality and its preparation will have a big influence on the final installation result. Subfloor defects can become visible through the LVT floor finish with time.

Subfloor (continued)

Approved substrates, correctly prepared include:

- Concrete, Marble, Terrazzo, Ceramic
- Metal floor
- WPB 6mm Plyboard (exterior grade plyboard, sanded face with ratings APA A-B, A-C, B-B, B-C, C-C plugged face)
- APA registered exterior grade underlayment, sanded face (grades as above)
- Raised access floor:
 - I. Panels are firm, level, smooth, dry and clean.
 - II. Lipping of panels must not exceed 0.75mm.
 - III. Height difference between panels must not exceed 0.75mm.
 - IV. Gaps between panels must not exceed 1mm.
 - V. Overall floor to be level within +/- 1.6mm

Alternative substrates should not be used as they may be prone to excessive movement during the life of the installation.

Any previously installed soft floorcovering and its debris should be removed before installation. (for example: Vinyl, carpet, linoleum, cork.)

Floor should be flat within 3mm across 2meters or achieve F32 rating by use of mechanical sanding / grinding or recommended levelling / patching compound.

The moisture content of the subfloor must be less than 3% CM or less than 80% Relative Humidity in case of cement screeds. If the moisture content is higher, an appropriate liquid damp proof layer can be applied, according to the manufacturer's instructions. Always measure, record and keep your test results. Sweep and vacuum to remove all debris before carrying out the test.

Milliken will not cover or accept responsibility for any joint telegraphing, either as a "ridge" or "valley" or improper subfloor preparation (high moisture or others).

Moisture Test

Moisture testing of all sub-floors is essential before installation can begin. This is true of new and old buildings. Moisture testing must be carried out and recorded. All moisture tests must be undertaken in accordance with BS 8203 (ASTM F1869 Calcium Chloride Test and ASTM F2170 in-situ relative humidity test) and using an appropriate method

to suit the sub-floor type. The sub-floor may be considered dry when less than 3% CM or the relative humidity is 80% Relative Humidity or below. If readings are above this level, a surface damp proof membrane can be applied. Consult manufacturers for instructions. Alternatively, sub-floors can be given enough time to dry.

Preparation by Floor Type

Ply board

If raised access floors or timber is not suitable, can be made suitable using appropriate grade Plyboard (6mm WPB) to create a sound substrate. This can reduce the risk of joint telegraphy from subfloor.

Fix the board at 100mm intervals round the perimeter and, 150mm centres to the field. Smooth out board joints using feathering compound. Sweep, vacuum remove dust and debris.

Tile flooring

If necessary, use a levelling compound to level all joints between the tiles. Preferably apply a second levelling compound.

All flooring

Primary, Levelling and Sanding – All Flooring

It is necessary to apply a primer, to ensure the smoothing / levelling compound has a good adhesion to the subfloor. Use the recommended roll, following the instructions of the primer compound. Once dry, apply a smoothing / levelling compound with a thickness of 3-5 mm, with an appropriate trowel, according to the manufacturer's instruction.

Finish the application with a spike roller to avoid air inclusions. Respect the recommended drying time as indicated by the producer. Prior to the final glue application, sand the levelling layer as recommended and vacuum.

For any site-specific concerns regarding sub-floor preparation and suitability for use with Milliken LVT, please contact our sub-floor preparation partner Ardex for further detailed advice: www.ardex.com


Final check before installation

1. It is good practice to make a final check of the sub-floor for minor defects.


2. Make sure the planks are sufficiently mixed when you install them, so that you do not end up with too many identical, lighter or dark panels in the same area.
3. Check all tiles in daylight before and during installation. Defective pieces must never be used.
4. The floor should preferably be installed parallel to how the light enters the room.

Installing Milliken LVT


The following installation methods should be used:




Monolithic




Quarter Turn



Half Drop



Plank



Herringbone

Milliken plank simulates wood planks and can be installed in the same pattern as a wood plank floor in a random pattern, staggered design, diagonally, Herringbone or other design.

1. Measure the room and find the centre line. Starting the installation from the centre line ensures a straight and symmetrical installation. The floor should preferably be installed in a direction parallel to the direction that light enters the space.
2. If necessary, you can shift the starting point to prevent any unnecessary small cuts. Milliken LVT can easily be cut with a cutter or utility knife. With the décor side face up find centre line.
3. Dry lay one plank/tile per row (without adhesive) from this centre line to the wall and ensure no small cuts are needed. Take away these planks.
4. Then start the installation from the centre line. Mix up the panels to become a nice pattern.
5. Dry lay the planks of 2 rows at a time. Cut the end planks to size ensuring an accurate cut. Milliken products can be cut using a tile cutter or a utility knife. Keep knife blades sharp for easy, accurate and safe cuts. Fit tiles to walls, columns, door jambs, etc. using the same methods other floor tiles; overlap, pattern scribe, wall scribe and free hand.
6. Now all panels of the rows are ready to be installed on the glue without unnecessary waiting time.
7. Pull back the rows of panels and apply Milliken's recommended adhesive to the floor using an A2 trowel to ensure correct application rate. It is strongly recommended to use the correct adhesive and roll with a 3-section 50 kg roller to ensure good transfer.

Recommended Adhesives

ARDEX AF130C for general absorbent substrate installation.

ARDEX AF-2510 (2-part polyurethane adhesive) for nonabsorbent substrate, areas of high exposure to direct sunlight, or prone to liquid spills.

Mapei Ultrabond Eco V4AP for general absorbent substrate installation.

Mapei ECO571 2K

(2-part polyurethane adhesive) for nonabsorbent substrate, areas of high exposure to direct sunlight, or prone to liquid spills.

After Installation

1. Be sure planks are set, flat and have tight edges.
2. Re-roll the entire installation, along the length and width of the planks with a 3-section 50Kg. roller to ensure all tiles are properly set into the adhesive. If necessary, weigh down any loose planks overnight to ensure bond.
3. Clean adhesive residue from the face of the flooring following these directions:
 - Wet adhesive residue: clean with white cloth dampened with warm, soapy water.
 - Dry adhesive residue: clean with mineral spirits or denatured alcohol and a clean cloth.
 - Epoxy or urethane adhesives: must be cleaned while wet according to the adhesive manufacturer's instructions.
4. If the plank flooring is not the last portion of the construction project, the floor must be protected from construction traffic and damage. Wait 24 hours and utilize a reinforced fibre protective board or a heavy kraft paper (min. 30Kg.) and cover the floor. Failure to wait 24 hours before covering can impact adhesive curing.

Initial Maintenance for owner

1. Thoroughly clean the floor using a neutral pH cleaner
2. Thoroughly damp mop the floor and allow to dry. Do not pour water on the floor.

Daily and Weekly Maintenance for owner

1. Sweep, vacuum or dust mop the floor as needed to remove dust loose dirt and grit. In high traffic areas this may be a daily or twice daily procedure. Use only vacuums that do not have bristle beater bars or metal heads.
2. Clean liquid spills immediately to prevent the possibility of stains, slips or falls.
3. Damp mop the floor as needed to remove dirt and stains. Use a neutral pH cleaner
4. Use mats at all entry areas to keep dirt, sand and water from the floor. Clean the mats on a regular basis. If mats are placed directly on top of the floor, be sure the mats have a non-staining back. Rubber mats are also not recommended over Milliken MLF flooring products.
5. Furniture shall have protective glides of at least 1" in diameter to minimize the chance of indentations or scratching to the surface of the floor. Do not use narrow chair glides! Felt pads are also excellent protection for the floor for furniture that will be frequently moved directly across the floor.
6. Do not move heavy furniture, appliances or fixtures directly across the floor. Use protective boards or appropriate furniture movers designed for use over hard surface flooring.
7. Protect the floor from direct sunlight by using appropriate window coverings.
8. Periodically clean caster wheels and check for wheels that may be broken or no longer rotating. Replace damaged wheels immediately.
9. Avoid use of metal or razor scrapers to remove dirt, residues or other marks from flooring. This will damage the protective wear layer of the vinyl flooring.