


Valores acústicos

GLASSHOUSE / Eden / Kew



Absorción del sonido (ISO 354)


Glasshouse WellBAC® Comfort
 α_w 0.30 Clase D

Impacto del sonido (ISO 140-8 / ISO 10140-3)

Glasshouse WellBAC® Comfort
 ΔL_w 30dB

Coefficiente de absorción del sonido Alpha α_s

Frecuencia (Hz)	WellBAC® Comfort α_s
100	0.00
125	0.02
160	0.03
200	0.03
250	0.05
315	0.08
400	0.19
500	0.51
630	0.36
800	0.26
1000	0.25
1250	0.25
1600	0.26
2000	0.30
2500	0.33
3150	0.36
4000	0.41
5000	0.43

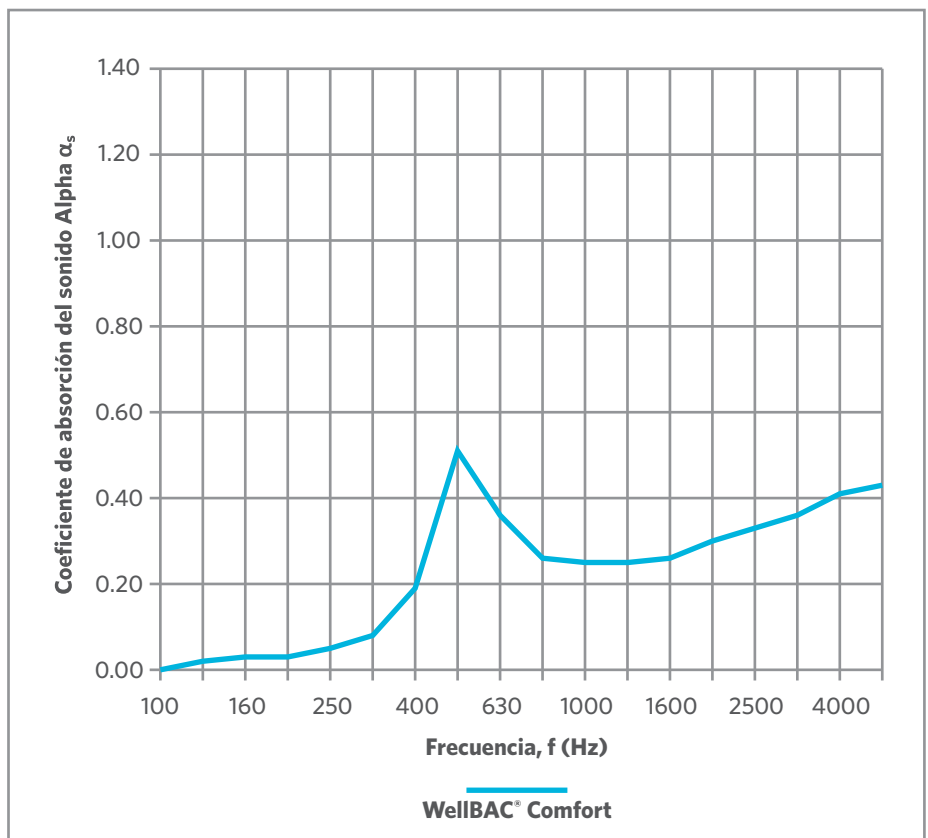

α_{pi} Valores (WellBAC® Comfort)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.35	0.25	0.30	0.40

α_w	Clase
(valor global) 0.30	D