

Valeurs acoustiques

SCULPTURED FORMS / High Relief / In The Round



Absorption des bruits aériens (ISO 354)


Isolation des bruits d'impacts (ISO 140-8 / ISO 10140-3)

Sculptured Forms WellBAC® Comfort Plus
 α_w 0.30 (H) Classe D

Sculptured Forms WellBAC® Comfort Plus
 ΔL_w 34dB

Coefficient d'absorption acoustique alpha α_s

Fréquence (Hz)	WellBAC® Comfort Plus α_s
100	-0.02
125	-0.01
160	0.05
200	0.07
250	0.08
315	0.13
400	0.45
500	0.42
630	0.29
800	0.25
1000	0.25
1250	0.27
1600	0.30
2000	0.32
2500	0.36
3150	0.40
4000	0.47
5000	0.46

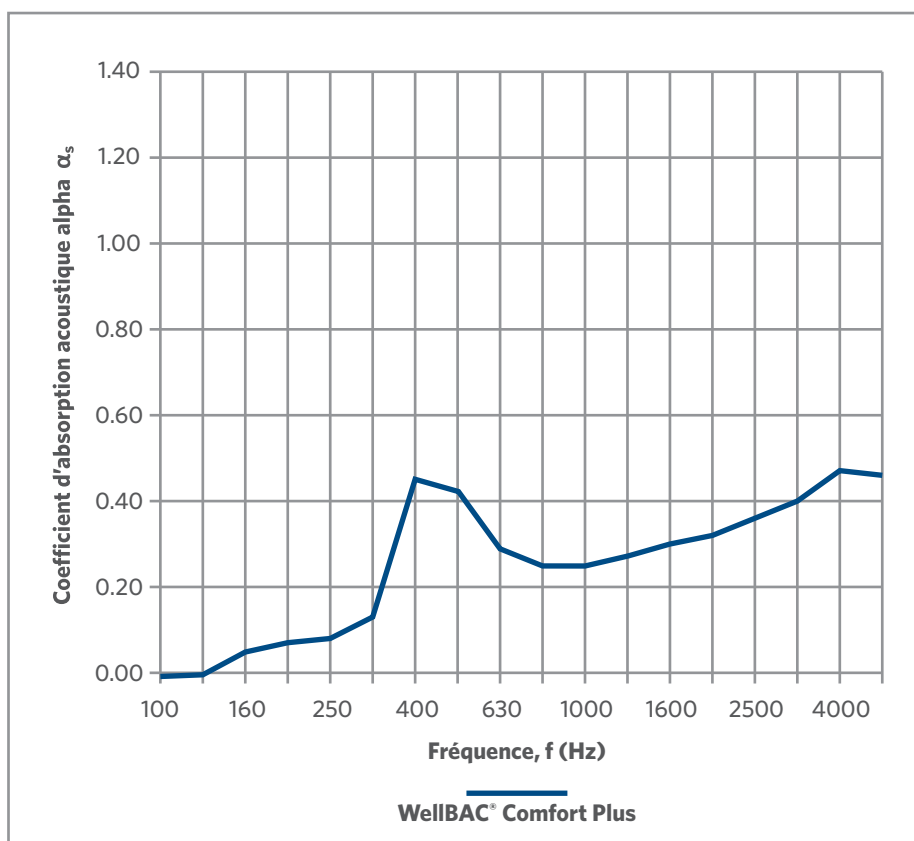

α_{pi} Valeurs (WellBAC® Comfort Plus)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.10	0.40	0.25	0.35	0.45

α_w Classe

(valeur globale)	Classe
0.30 (H)	D