AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client: Milliken (Australia) Pty Ltd

171 Briens Road Northmead NSW 2152 Test Number : 25-001856
Issue Date : 1/07/2025
Print Date : 1/07/2025
Order Number : 6701648235


Sample Description Clients Ref : "Renasci Flooring Panels"

Flooring panels

Colour : Multicolour End Use : Flooring

Nominal Composition : Mixed Polymers

Nominal Thickness: 6.5mm

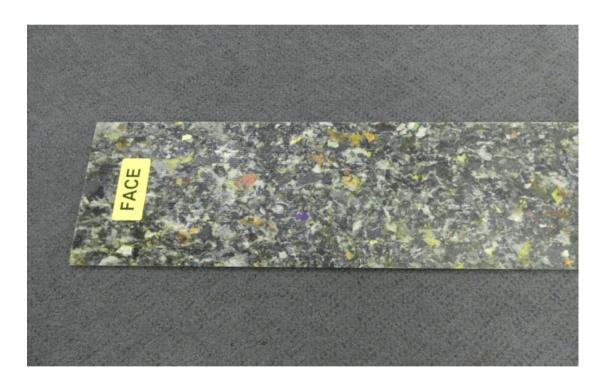

352732 77142 Page 1 of 2

Australian Wool Testing Authority Ltd Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



MICHAEL A. JACKSON B.Sc.(Hons)

Chris Campbell

APPROVED SIGNATORY

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client: Milliken (Australia) Pty Ltd

171 Briens Road Northmead NSW 2152 **Test Number** : 25-001856 **Issue Date** : 1/07/2025

Print Date : 1/07/2025 Order Number : 6701648235

AS ISO 9239.1-2003

Reaction to Fire Tests for Floorings. Determination of the Burning Behaviour using a Radiant Heat Source

Date of Sample Arrival 14-05-2025

Date Tested 30-06-2025

CHF Value 2 3 Mean 2.7 3.2 2.7 2.9 kW/m² Non Directional HF-30 Value 2 3 1 Mean 3.1 4.4 2.9 3.5 kW/m² Non Directional Smoke Value 3 Mean 536 522 %.min 733 597 Non Directional

Observations:

Melting

Each specimen was clamped to a substrate of 6mm thick fibre reinforced cement board prior to testing.

No directional properties, three specimens tested only.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 8.4 have not been included in the report. They are available upon request.

352732

Australian Wool Testing Authority Ltd Copyright - All Rights Reserved 77142

Page 2 of 2



Accredited for compliance with ISO/IEC 17025 - Testing Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.

Chris Campbell

IOHAEL A. JACKSON B.Sc.(Hons)

0204/11/06

APPROVED SIGNATORY