





QUICK SHIP: TWO

Milliken.


## SHIPS WITHIN 3 DAYS





# Ships within 3 days.

The Milliken Quick Ship program offers five of our best selling collections in a curated selection of colors, all with a 3-day lead time. Equipped with our innovative WellBAC® cushion backing, these collections provide the best combination of durability and support.

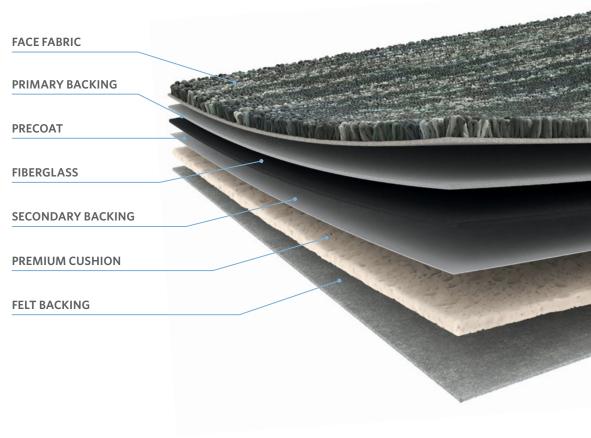

## **Major Frequency: One**







Waver VBN211-106



Overtone VBN211-27-217



**Flux** VBN27-152



Tremor VBN209-118



Interference VBN183-118-152



Strident VBN79-152



Waver DTN211-106



Overtone DTN211-27-217



Flux DTN27-152




Tremor DTN209-118



Interference DTN183-118-152



Strident DTN79-152

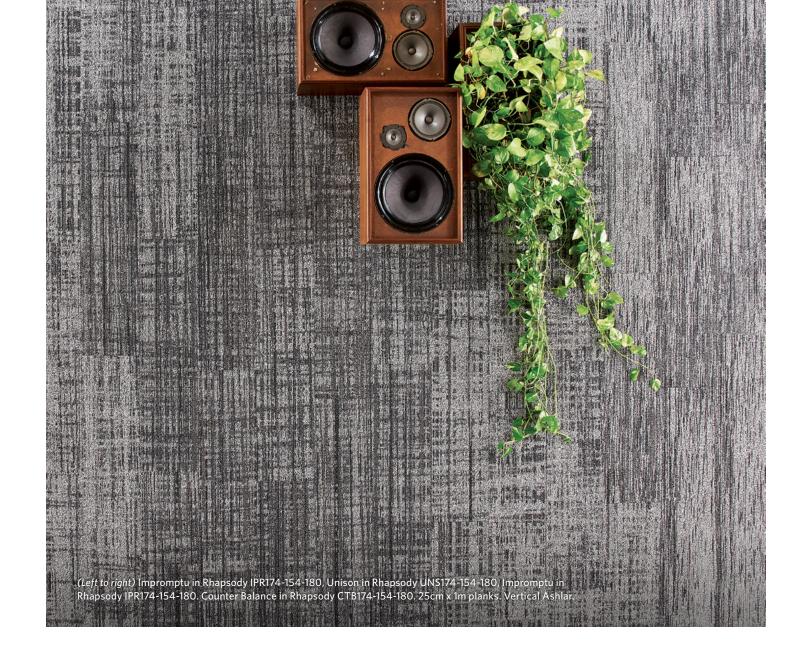

## COUNTER BALANCE



**Rhapsody** CTB174-154-180



Production CTB124-13-144



Boost CTB161-141-19

### **IMPROMPTU**



Rhapsody IPR174-154-180



Production IPR124-13-144



**Boost** IPR161-141-19

## **Major Frequency: Three**



## **Stereovision**





## LIGHT WAVE



Spectral LWV153



Electropunk LW V72-118



Vectograph LW V118



Gearhead LWV27



Airglow LW V13



Augment LW V79



Dimensional LW V174



### **HEAD START**







Vigilant HEA235

Conscious HEA79







Sensible HEA120

Authentic HEA145

## **Clean Break**



## **Tracing Landscapes**






### **GEOGRAPHY LESSON**



Muddy Boots GLN13



Wind Vane GLN05

**Tar** GLN154-133



Silver Lakes GLN139

### FIELD STUDY



Muddy Boots FSY13



Charred FSY174



**Tar** FSY154-133



Wind Vane FSY05



Silver Lakes FSY139

### MAJOR FREQUENCY: ONE // Vibration, Distortion

Tufted, Textured Loop

#### **Plank Size**

25 cm x 1 m (9.84" x 39.4")

#### **Yarn Type**

Universal Fibers® Solution-Dyed Nylon

#### Stain Resist / Soil Release StainSmart®

#### **Nominal Total Thickness** *Vibration:* 0.29" (7.4 mm) *Distortion:* 0.31" (7.9 mm)

#### **Standard Backing**

PVC-Free WellBAC® **Comfort Cushion** Available with TractionBack

#### **Texture Appearance Retention Rating** (TARR)

Severe Traffic End-Use Applications

#### Recommended Installation Method(s) Ashlar, Halfdrop, Random, Herringbone







### Construction

Field Study: Tufted, Textured Loop Geography Lesson: Tufted, Textured Tip Shear

#### Tile Size

50 cm x 50 cm (19.7" x 19.7")

#### Yarn Type

ECONYL® Solution-Dyed Recycled Nylon

## **Stain Resist / Soil Release**

StainSmart®

TRACING LANDSCAPES // Geography Lesson, Field Study

## **Nominal Total Thickness**

Geography Lesson: 0.32" (8.1 mm) Field Study: 0.32" (8.1 mm)

#### **Standard Backing**

**PVC-Free WellBAC® Comfort Cushion** 

#### **Texture Appearance Retention Rating** (TARR)

Heavy Traffic End-Use Application

## **Recommended Installation Method(s)**

Monolithic, Horizontal ashlar





## MAJOR FREQUENCY: THREE // Counter Balance, Impromptu

#### Construction

Tufted, Textured Loop

#### **Plank Size**

25 cm x 1 m (9.84" x 39.4")

#### Yarn Type

Universal Fibers® Solution-Dyed Nylon

### Stain Resist / Soil Release

StainSmart®

#### **Nominal Total Thickness**

Counter Balance: 0.292" (7.4 mm) Impromptu: 0.29" (7.4 mm)

#### **Standard Backing**

PVC-Free WellBAC® Comfort Cushion

#### **Texture Appearance Retention Rating** (TARR)

Severe Traffic End-Use Applications

#### **Recommended Installation Method(s)**

Ashlar, Halfdrop, Random, Herringbone









## **STEREOVISION** // Light Wave

#### Construction

Tufted, Textured Loop

#### **Plank Size**

25 cm x 1 m (9.84" x 39.4")

#### Yarn Type

Universal Fibers® Solution-Dyed Nylon

## Stain Resist / Soil Release

StainSmart®

### **Nominal Total Thickness**

0.301" (7.65 mm)

#### **Standard Backing**

PVC-Free WellBAC® Comfort Cushion

## **Texture Appearance Retention Rating**

Heavy Traffic End-Use Applications

#### **Recommended Installation Method(s)** Ashlar, Halfdrop, Random, Herringbone









## **CLEAN BREAK** // Head Start

#### Construction

Tufted, Textured Loop

### **Tile Size**

50 cm x 50 cm (19.7" x 19.7")

#### Yarn Type

ECONYL® Solution-Dyed Recycled Nylon

## Stain Resist / Soil Release

StainSmart®

### **Nominal Total Thickness**

0.33" (8.3 mm)

#### **Standard Backing**

**PVC-Free WellBAC® Comfort Cushion** Available with TractionBack®

## **Texture Appearance Retention Rating**

Heavy Traffic End-Use Applications

#### **Recommended Installation Method** Monolithic







## PACKED with PERFORMANCE.







WellBAC® cushion backing enhances ergonomics and underfoot comfort, reducing as much as 24% of muscle strain (compared to hardback).



The acoustic technology of our carpet reduces noise by up to 50% as compared to other flooring.




WellBAC® open-cell backing allows the floor to breathe. In fact, we haven't seen a moisture claim in 20+ years.



Save time and money with installation. Our carpet tiles can be installed over old adhesive and it's rarely necessary to scarify or seal the floor.



Designed with wellness and circularity in mind, this collection features carpet materials that are Red List Free and PVC-Free, including 100% ECONYL yarn.



#### CLIMATE IMPACT

Our climate is changing. Milliken takes a holistic approach reducing our products' embodied carbon without compromise to quality. We champion circularity through our N/XT Life™ reclamation program, and continue on our carbon reduction journey offsetting the full cradle-to-gate carbon footprint through our M/PACT™ program.









MATERIAL HEALTH

Our innovative flooring solutions pave the way

for healthier, happier, more productive spaces. All

Milliken carpet is PVC-Free and free of harmful Red

List materials. Crafted with 100% ECONYL® yarn, this

collection gives new life to regenerated materials. With

100% material transparency, low-VOC, and less new

raw materials, we aim to eliminate harmful chemicals in-line with the highest voluntary standard.









## N/XT LIFE

M/PACT

CIRCULARITY PROGRAM

Milliken

Customer Concierge 800.824.2246 | millikenfloors.com © 2025 Milliken & Company | Design © Milliken & Company | Made in the USA

2710036356 CP 0725

#### **SHOWN ON THE COVER**

(Front, Clockwise) Stereovision Light Wave in Gearhead LWV27. Herringbone. Major Frequency: One Distortion in Tremor DTN209-118. Vertical Ashlar. Clean Break Head Start in Vigilant HEA235. Monolithic. Major Frequency: Three Impromptu in Rhapsody IPR174-154-180 and Counter Balance in Rhapsody CTB174-154-180. Ashlar. (Back) Head Start in Sensible HEA120. Horizontal Ashlar.

Images in this brochure are approximate for color and pattern scale. Please use actual carpet samples to make your final selections.