


# Valeurs acoustiques

## OUT OF THE SHADOWS 2.0 / Scattergraph / Shadowbox / Shardlines



### Absorption des bruits aériens (ISO 354)


### Isolation des bruits d'impacts (ISO 140-8 / ISO 10140-3)

Out of the Shadows 2.0  
Comfort Plus®  $\alpha_w$  0.30 Classe D

Out of the Shadows 2.0  
Comfort Plus®  $\Delta L_w$  33dB

### Coefficient d'absorption acoustique alpha $\alpha_s$

Fréquence (Hz)	Comfort Plus® $\alpha_s$
100	0.04
125	0.03
160	0.04
200	0.06
250	0.09
315	0.18
400	0.50
500	0.42
630	0.32
800	0.27
1000	0.26
1250	0.26
1600	0.29
2000	0.32
2500	0.32
3150	0.38
4000	0.41
5000	0.46

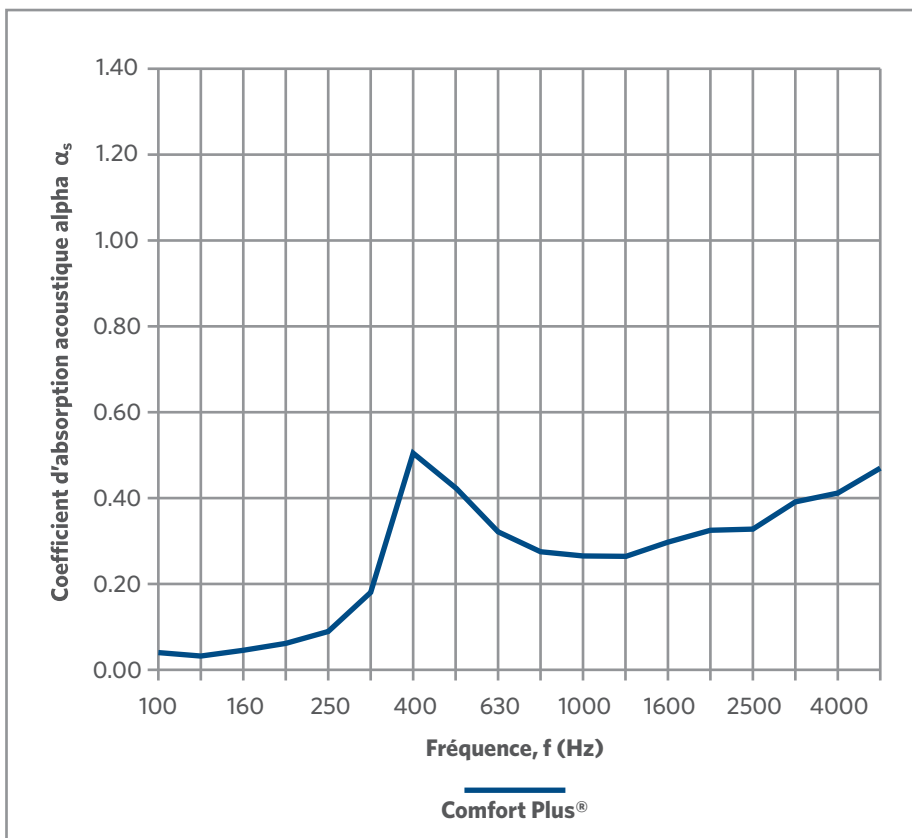

$\alpha_p$ Valeurs (Comfort Plus®)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.10	0.40	0.25	0.30	0.40

$\alpha_w$	Classe
(valeur globale) 0.30	D