


Akustische Werte

NORTHWARD BOUND 2.0 /

Firn / Glacier / Snow



Schallabsorptionsgrad (ISO 354)


Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Northward Bound 2.0 WellBAC® Comfort
 α_w 0.30 Klasse D

Northward Bound 2.0 WellBAC® Comfort
 ΔL_w 30dB

Alpha α_s Schallabsorptionsgrad

Frequenz (Hz)	WellBAC® Comfort α_s
100	0.03
125	-0.02
160	0.05
200	0.02
250	0.04
315	0.08
400	0.20
500	0.55
630	0.33
800	0.24
1000	0.23
1250	0.25
1600	0.26
2000	0.29
2500	0.31
3150	0.35
4000	0.39
5000	0.39

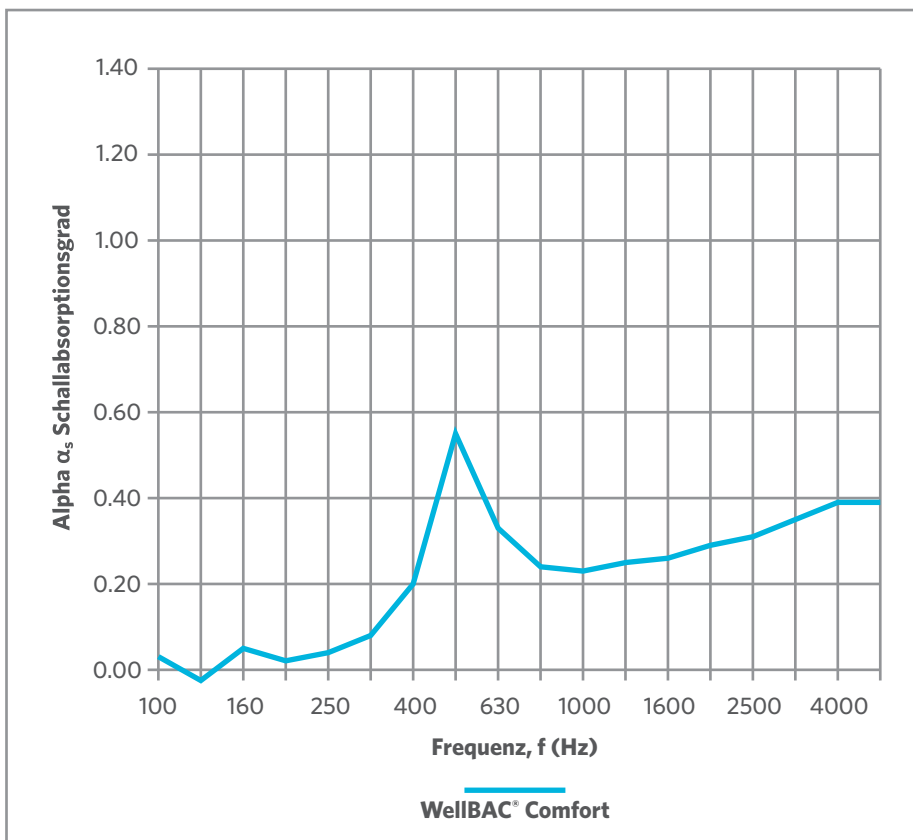

α_{pi} Werte (WellBAC® Comfort)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.35	0.25	0.30	0.40

α_w	Klasse
(Gesamtwert) 0.30	D