

RigidForm™

A SECURE LOCK SYSTEM FLOORING

Primed to perform.

When it comes to LVT, one size doesn't always fit all. LVT products come on many product platforms as each market segment has unique needs. RigidForm™ has a rigid core platform that provides exceptional durability, helps hide subfloor imperfections.

SMARTER INSTALLATION SYSTEM

- The Interlocking Rigid Layer makes install on site more easier and quicker. Whether its a new installation or a single tile replacement, the click system will not challenge you in the process.

SAVING TIME

- RigidForm™ can be installed on most floor conditions, including raised floor, concrete floor and other existing substrates. Thus, virtually eliminating prep time while also hiding subfloor imperfections. This also eliminates the need for adhesives, improving indoor air qualities of the space.

QUIETER FLOORS

- While noise generation is important, through floor noise transmission is also key. Milliken's RigidForm™ construction comes with a pre-attached underlayment foam pad, helping acoustics within the environment.

ENGINEERED

- RigidForm™ is designed to perform in a demanding environment with limited maintenance. PROGUARD™ enables best in class scratch, stain and scuff resistance. Heavy commercial grade 0.55 mm transparent wear layer protects the texture visuals and ensures product performs in the heaviest foot traffic.

PROGUARD™ REINFORCED POLYURETHANE

Provides superior stain and scratch resistance, eliminates the need for polishes/waxes, for reduced maintenance costs and improved indoor Air Quality (IAQ) performance.

WEAR LAYER

Transparent embossed 0.55 mm wear layer provides protection and appearance retention in demanding commercial environments.

PRINTED LAYER


High-resolution printed film delivers stunning realistic visuals of wood and stone.

INTERLOCKING RIGID LAYER

This stable layer provides unsurpassed durability that also hides subfloor imperfections, with a locking mechanism that allows for quick and easy adhesive-free installation.

INTEGRAL ACOUSTIC BACKING

Pre-attached underlayment minimizes sound, is shock absorbent, and further assists with concealment of subfloor imperfections.

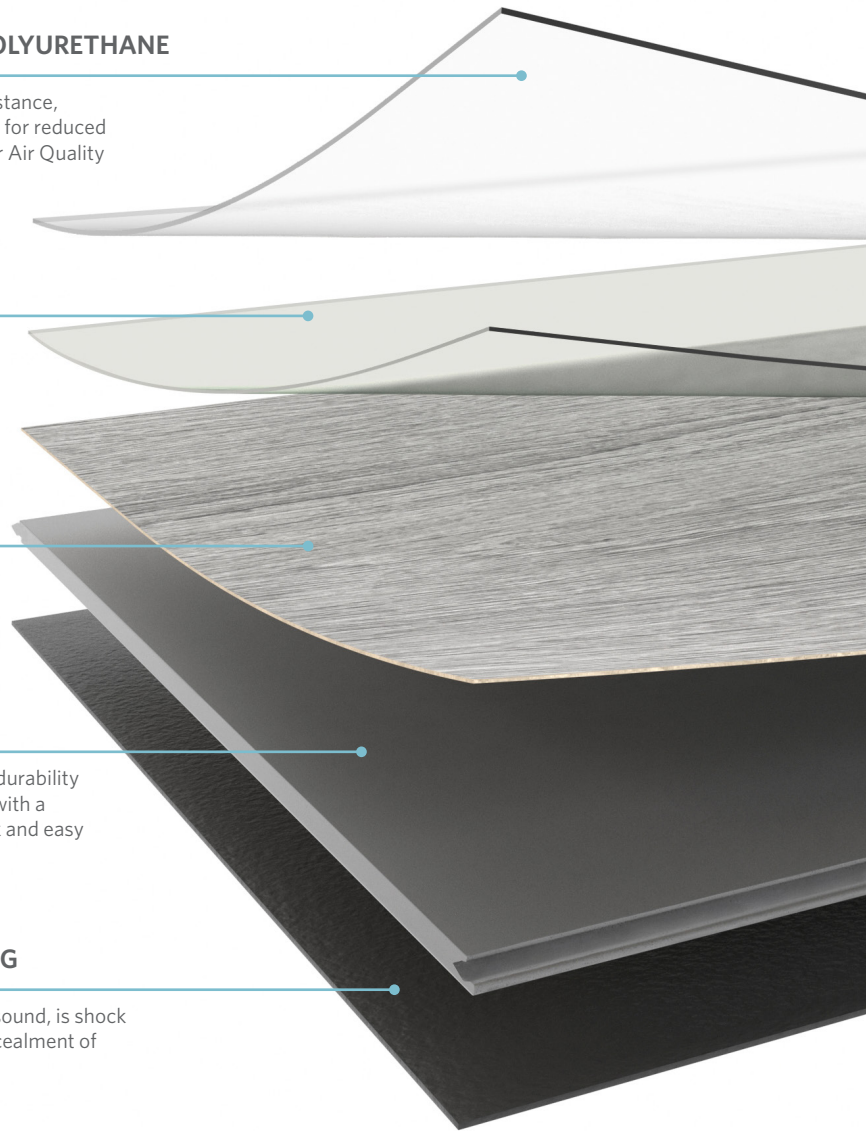

Declare.



Milliken™

Customer Service AUS: 1800.668372 | NZ: 0800.668372
www.millikenfloors.com.au | © 2023 Milliken & Company
Design © Milliken & Company

RIGIDFORM™

- * Holds heavy loads
- * Acclimation from temperature

PROGUARD™

- * Enhanced protected from scratch- and scuff-resistance
- * Resists stains and chemicals
- * Easy maintenance, no need for polish or wax

SUSTAINABILITY

- * Certified to the most stringent global environmental standards.

MICROBEVEL

- * Reduces issues on floor leveling.
- * Improved safety when walking barefoot.

WATERPROOF

- * Easy to clean with damp mop

WARRANTY

- * 15 years warranty