

Akustische Werte


NORTHERN SOUL / Floor Filler / Night Flyer /
Soundtrack / Strobe Light



Schallabsorptionsgrad (ISO 354)	Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)
Northern Soul WellBAC® Comfort α_w 0.25 Klasse E	Northern Soul WellBAC® Comfort ΔL_w 31dB

Alpha α_s Schallabsorptionsgrad

Frequenz (Hz)	WellBAC® Comfort α_s
100	0.03
125	0.01
160	0.04
200	0.02
250	0.07
315	0.09
400	0.28
500	0.59
630	0.29
800	0.21
1000	0.18
1250	0.19
1600	0.23
2000	0.26
2500	0.29
3150	0.33
4000	0.36
5000	0.40

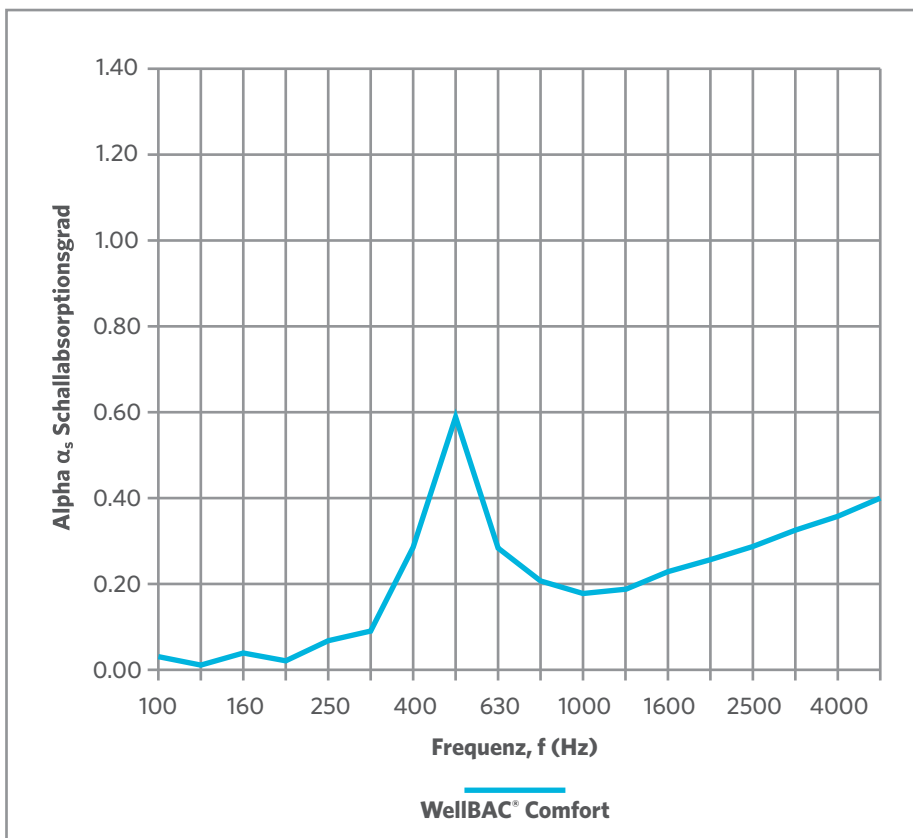

α_{pi} Werte (WellBAC® Comfort)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.05	0.40	0.20	0.25	0.35

α_w	Klasse
(Gesamtwert) 0.25	E