


Valeurs acoustiques

GLASSHOUSE / Eden / Kew



Absorption des bruits aériens (ISO 354)


Isolation des bruits d'impacts (ISO 140-8 / ISO 10140-3)

Glasshouse WellBAC® Comfort
 α_w 0.30 Classe D

Glasshouse WellBAC® Comfort
 ΔL_w 30dB

Coefficient d'absorption acoustique α_s

Fréquence (Hz)	WellBAC® Comfort α_s
100	0.00
125	0.02
160	0.03
200	0.03
250	0.05
315	0.08
400	0.19
500	0.51
630	0.36
800	0.26
1000	0.25
1250	0.25
1600	0.26
2000	0.30
2500	0.33
3150	0.36
4000	0.41
5000	0.43

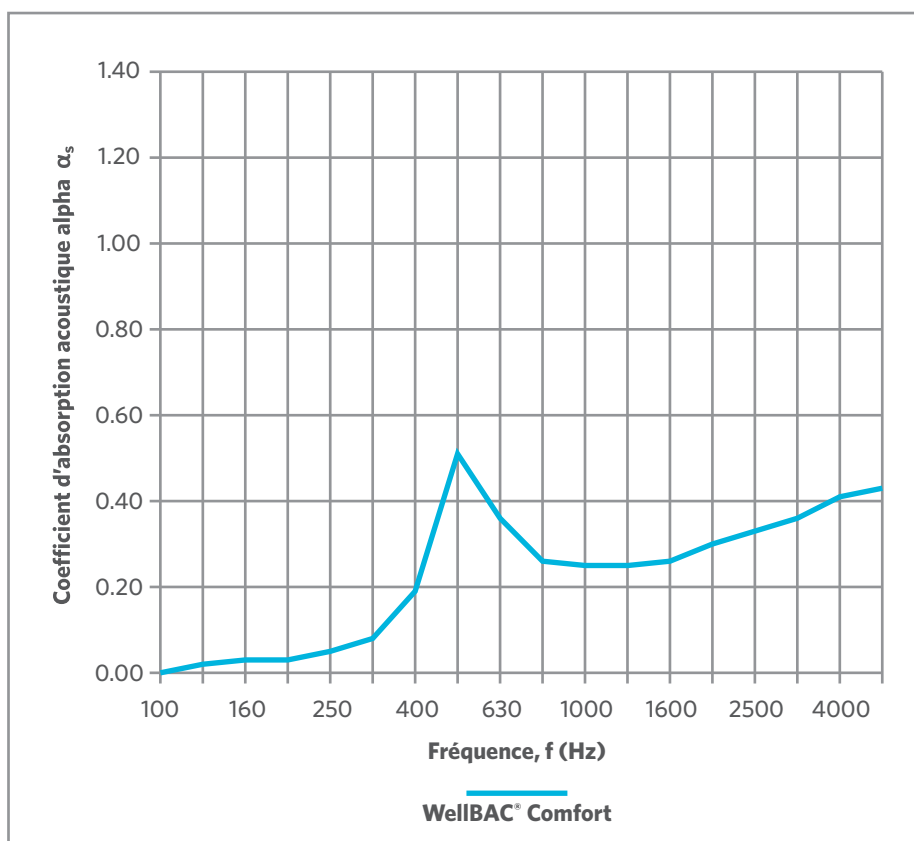

α_{pi} Valeurs (WellBAC® Comfort)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.35	0.25	0.30	0.40

α_w Classe

(valeur globale)	Classe
0.30	D