

Valores acústicos

SCULPTURED FORMS / High Relief / In The Round



Absorción del sonido (ISO 354)


Impacto del sonido (ISO 140-8 / ISO 10140-3)

Sculptured Forms WellBAC® Comfort Plus
 α_w 0.30 (H) Clase D

Sculptured Forms WellBAC® Comfort Plus
 ΔL_w 34dB

Coefficiente de absorción del sonido Alpha α_s

| Frecuencia (Hz) | WellBAC® Comfort Plus α_s |
|-----------------|----------------------------------|
| 100 | -0.02 |
| 125 | -0.01 |
| 160 | 0.05 |
| 200 | 0.07 |
| 250 | 0.08 |
| 315 | 0.13 |
| 400 | 0.45 |
| 500 | 0.42 |
| 630 | 0.29 |
| 800 | 0.25 |
| 1000 | 0.25 |
| 1250 | 0.27 |
| 1600 | 0.30 |
| 2000 | 0.32 |
| 2500 | 0.36 |
| 3150 | 0.40 |
| 4000 | 0.47 |
| 5000 | 0.46 |

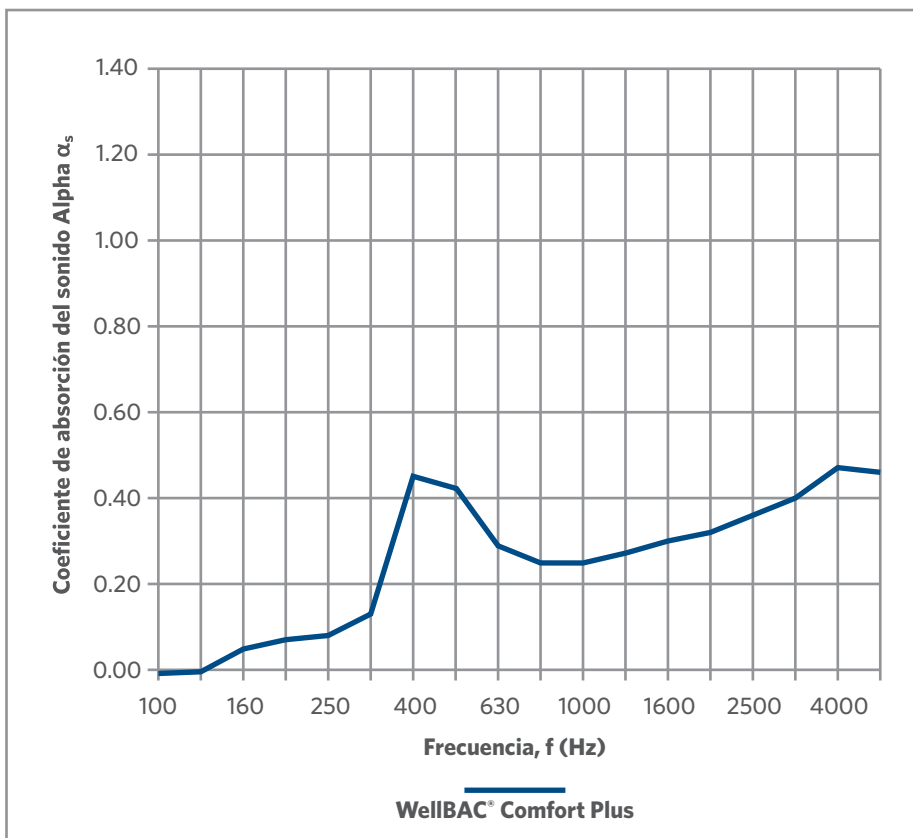

| α_{pi} Valores (WellBAC® Comfort Plus) | | | | | |
|---|--------|--------|---------|---------|---------|
| 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz |
| 0.00 | 0.10 | 0.40 | 0.25 | 0.35 | 0.45 |

| α_w | Clase |
|----------------|-------|
| (valor global) | |
| 0.30 (H) | D |