


Valeurs acoustiques

COMFORTABLE CONCRETE 2.0 / Laid Bare /
Urban Drama / Urban Poetry



Absorption des bruits aériens (ISO 354)


Isolation des bruits d'impacts (ISO 140-8 / ISO 10140-3)

Comfortable Concrete 2.0
Comfort Plus® α_w 0.30 Classe D

Comfortable Concrete 2.0
Comfort Plus® ΔL_w 33dB

Coefficient d'absorption acoustique alpha α_s

Fréquence (Hz)	Comfort Plus® α_s
100	-0.04
125	0.01
160	0.02
200	0.05
250	0.07
315	0.18
400	0.48
500	0.37
630	0.27
800	0.22
1000	0.23
1250	0.24
1600	0.26
2000	0.30
2500	0.32
3150	0.35
4000	0.38
5000	0.42

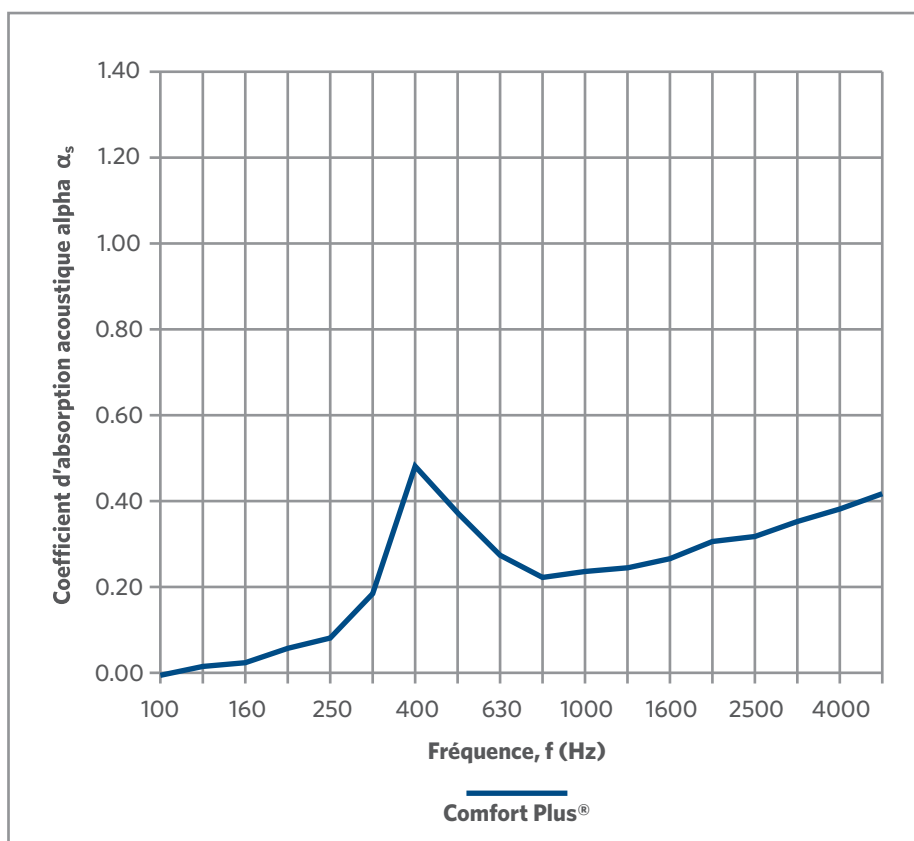

α_p Valeurs (Comfort Plus®)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.00	0.05	0.20	0.40	0.50

α_w	Classe
(valeur globale) 0.30	D