


# Akustische Werte

**COMFORTABLE CONCRETE 2.0** / Laid Bare /  
Urban Drama / Urban Poetry



## Schallabsorptionsgrad (ISO 354)


## Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Comfortable Concrete 2.0  
Comfort Plus® Polsterrücken  $\alpha_w$  0.30 Klasse D

Comfortable Concrete 2.0  
Comfort Plus® Polsterrücken  $\Delta L_w$  33dB

### Alpha $\alpha_s$ Schallabsorptionsgrad

Frequenz (Hz)	Comfort Plus® Polsterrücken $\alpha_s$
100	-0.04
125	0.01
160	0.02
200	0.05
250	0.07
315	0.18
400	0.48
500	0.37
630	0.27
800	0.22
1000	0.23
1250	0.24
1600	0.26
2000	0.30
2500	0.32
3150	0.35
4000	0.38
5000	0.42

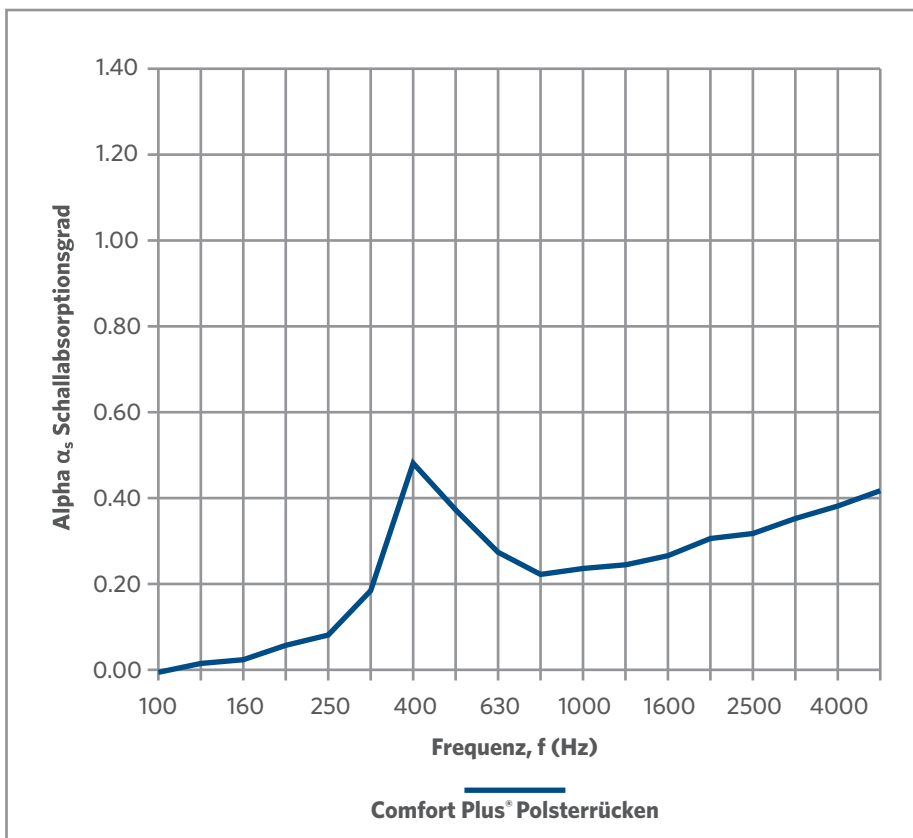

### $\alpha_p$ Werte (Comfort Plus® Polsterrücken)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.00	0.05	0.20	0.40	0.50

### $\alpha_w$ Klasse

(Gesamtwert)	Klasse
0.30	D