

# Akustische Werte

## SCULPTURED FORMS / High Relief / In The Round



### Schallabsorptionsgrad (ISO 354)


### Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Sculptured Forms WellBAC® Comfort Plus  
Polsterrücken  $\alpha_w$  0.30 (H) Klasse D

Sculptured Forms WellBAC® Comfort Plus  
Polsterrücken  $\Delta L_w$  34dB

### Alpha $\alpha_s$ Schallabsorptionsgrad

Frequenz (Hz)	WellBAC® Comfort Plus Polsterrücken $\alpha_s$
100	-0.02
125	-0.01
160	0.05
200	0.07
250	0.08
315	0.13
400	0.45
500	0.42
630	0.29
800	0.25
1000	0.25
1250	0.27
1600	0.30
2000	0.32
2500	0.36
3150	0.40
4000	0.47
5000	0.46

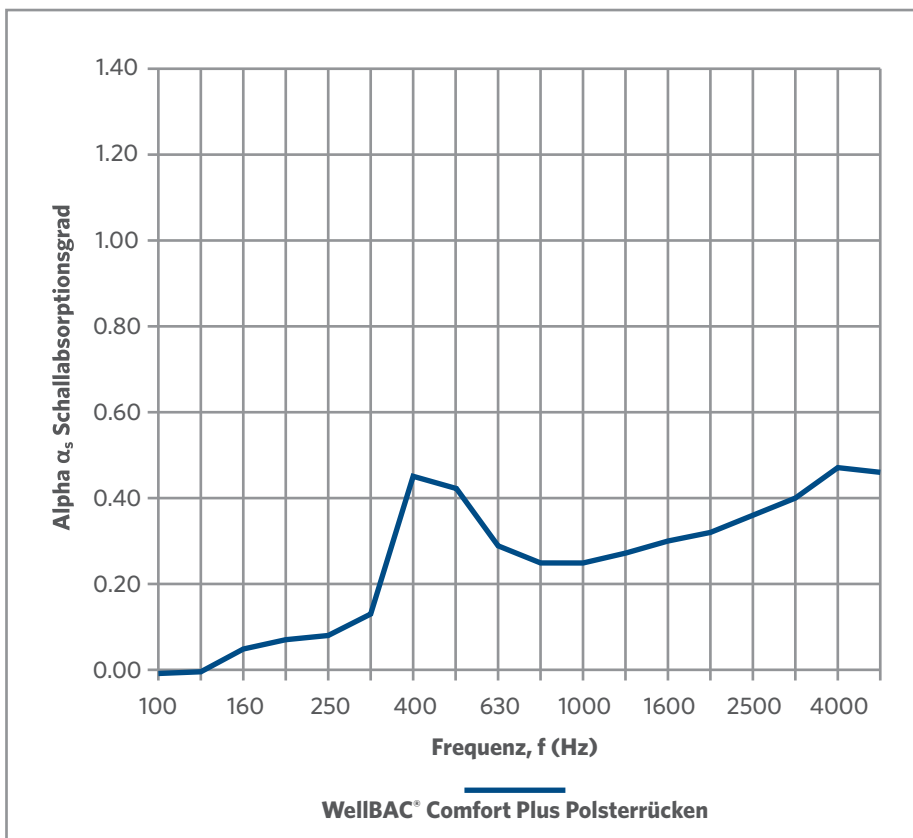

### $\alpha_{pi}$ Werte (WellBAC® Comfort Plus Polsterrücken)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.10	0.40	0.25	0.35	0.45

### $\alpha_w$ Klasse

(Gesamtwert)	D
0.30 (H)	