

Akustische Werte

CLERKENWELL / Angled Walk / Circle Top View /
Ely Place / Three Corners / Time Piece / Travelling Line /
Triangular Path / Watch Making



Schallabsorptionsgrad (ISO 354)


Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Clerkenwell Comfort Lite Polsterrücken
 α_w 0.25 Klasse E

Clerkenwell Comfort Lite Polsterrücken
 ΔL_w 31dB

Alpha α_s Schallabsorptionsgrad

Frequenz (Hz)	Comfort Lite Polsterrücken α_s
100	0.03
125	0.01
160	0.04
200	0.02
250	0.07
315	0.09
400	0.28
500	0.59
630	0.29
800	0.21
1000	0.18
1250	0.19
1600	0.23
2000	0.26
2500	0.29
3150	0.33
4000	0.36
5000	0.40

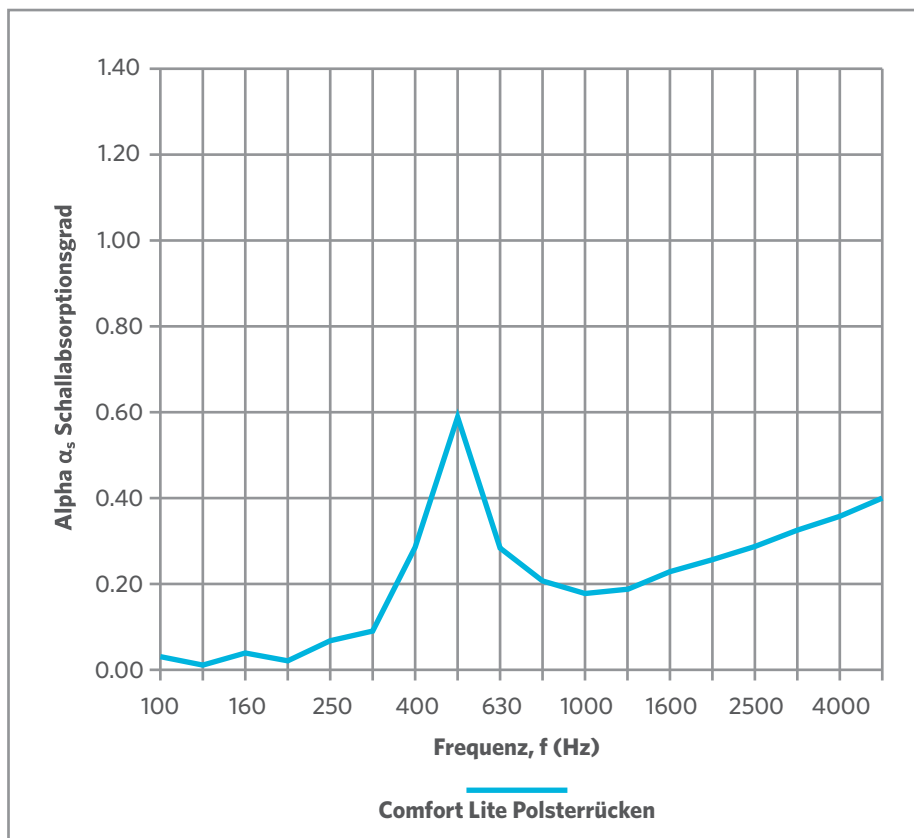

α_p Werte (Comfort Lite Polsterrücken)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.05	0.40	0.20	0.25	0.35

α_w Klasse

α_w (Gesamtwert)	Klasse
0.25	E