


Akustische Werte

WIREFRAME / WIREFRAME EXPRESSIONS



Schallabsorptionsgrad (ISO 354)


Trittschallverbesserungsmaß (ISO 140-8 / ISO 10140-3)

Wireframe / Wireframe Expressions
Comfort Lite Polsterrücken α_w 0.30 Klasse D

Wireframe / Wireframe Expressions
Comfort Lite Polsterrücken ΔL_w 32dB

Alpha α_s Schallabsorptionsgrad

Frequenz (Hz)	Comfort Lite Polsterrücken α_s
100	0.02
125	0.03
160	0.04
200	0.04
250	0.05
315	0.09
400	0.17
500	0.38
630	0.39
800	0.26
1000	0.23
1250	0.24
1600	0.25
2000	0.28
2500	0.30
3150	0.33
4000	0.37
5000	0.40

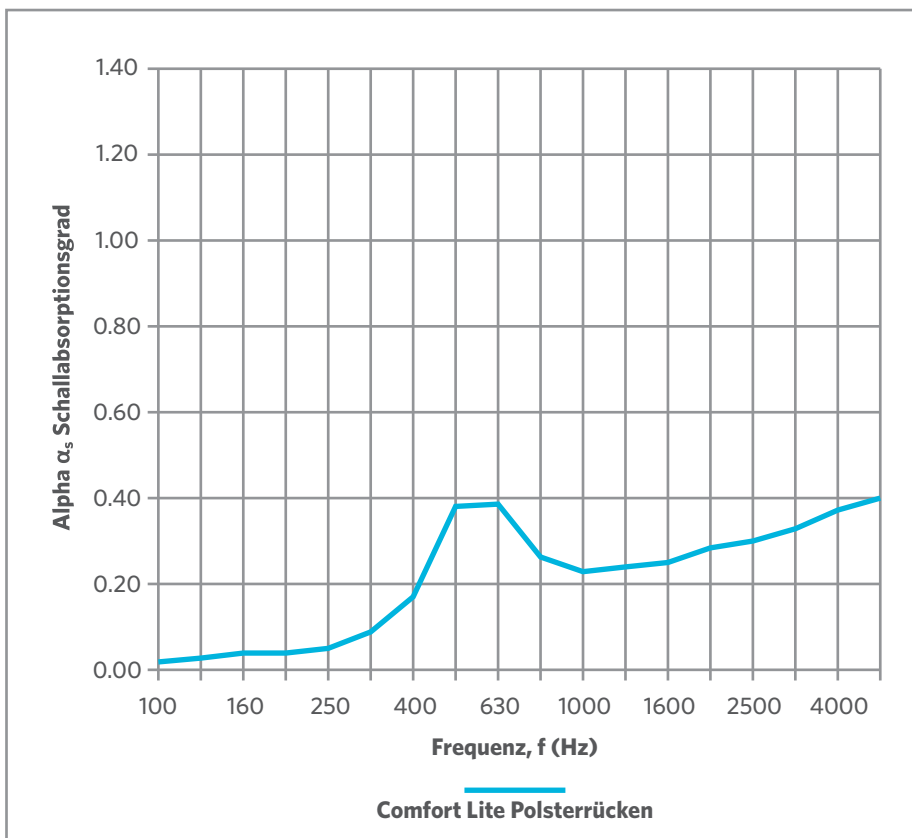

α_p Werte (Comfort Lite Polsterrücken)

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.05	0.30	0.25	0.30	0.35

α_w Klasse

α_w (Gesamtwert)	Klasse
0.30	D