


Valores acústicos


CRAFTED SERIES / Modern Maker /
Woven Colour / Warp Winding



Absorción del sonido (ISO 354)	Impacto del sonido (ISO 140-8 / ISO 10140-3)
Crafted Series Almohadillado α_w 0.25 Clase E	Crafted Series Almohadillado ΔL_w 31dB

Coefficiente de absorción del sonido Alpha α_s

Frecuencia (Hz)	Almohadillado α_s
100	0.03
125	0.01
160	0.04
200	0.02
250	0.07
315	0.09
400	0.28
500	0.59
630	0.29
800	0.21
1000	0.18
1250	0.19
1600	0.23
2000	0.26
2500	0.29
3150	0.33
4000	0.36
5000	0.40

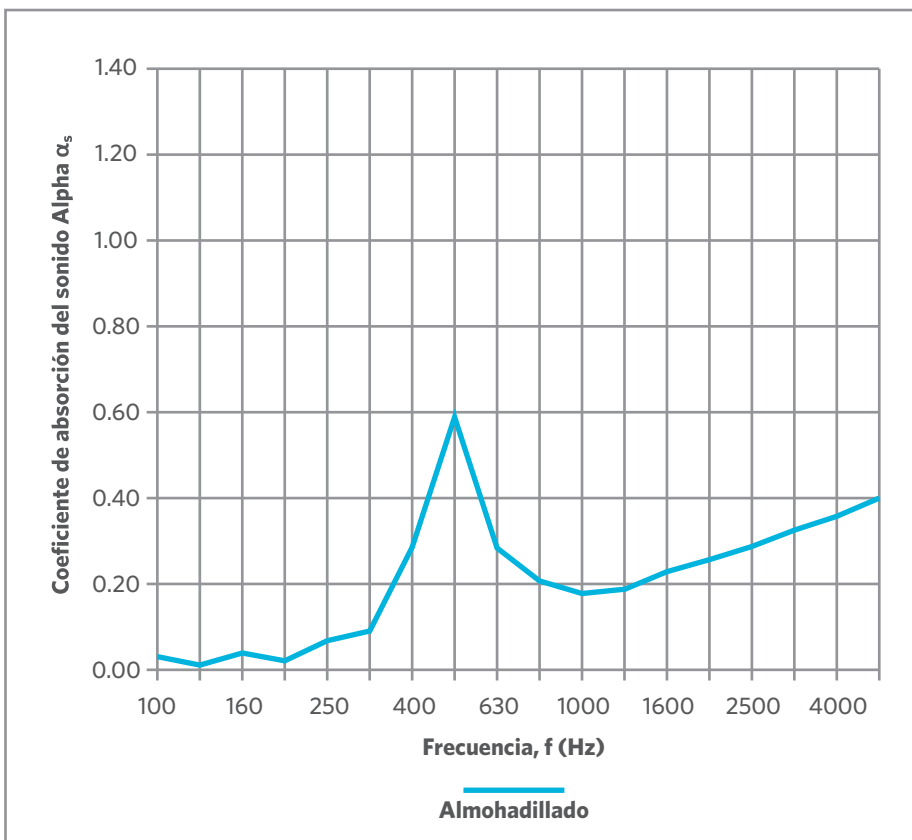

α_p Valores (Almohadillado)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.05	0.40	0.20	0.25	0.35

α_w	Clase
(valor global) 0.25	E