


Valores acústicos


DISSIDENT 2.0 / DISSIDENT 2.0 / TRANSITIONS



Absorción del sonido (ISO 354)	Impacto del sonido (ISO 140-8 / ISO 10140-3)
Dissident 2.0 & Dissident 2.0 Transitions Comfort Plus® α_w 0.30 (H) Clase D	Dissident 2.0 & Dissident 2.0 Transitions Comfort Plus® ΔL_w 33dB

Coefficiente de absorción del sonido Alpha α_s

Frecuencia (Hz)	Comfort Plus® α_s
100	0.00
125	0.04
160	0.05
200	0.06
250	0.07
315	0.18
400	0.51
500	0.43
630	0.24
800	0.26
1000	0.26
1250	0.27
1600	0.32
2000	0.37
2500	0.40
3150	0.46
4000	0.56
5000	0.69

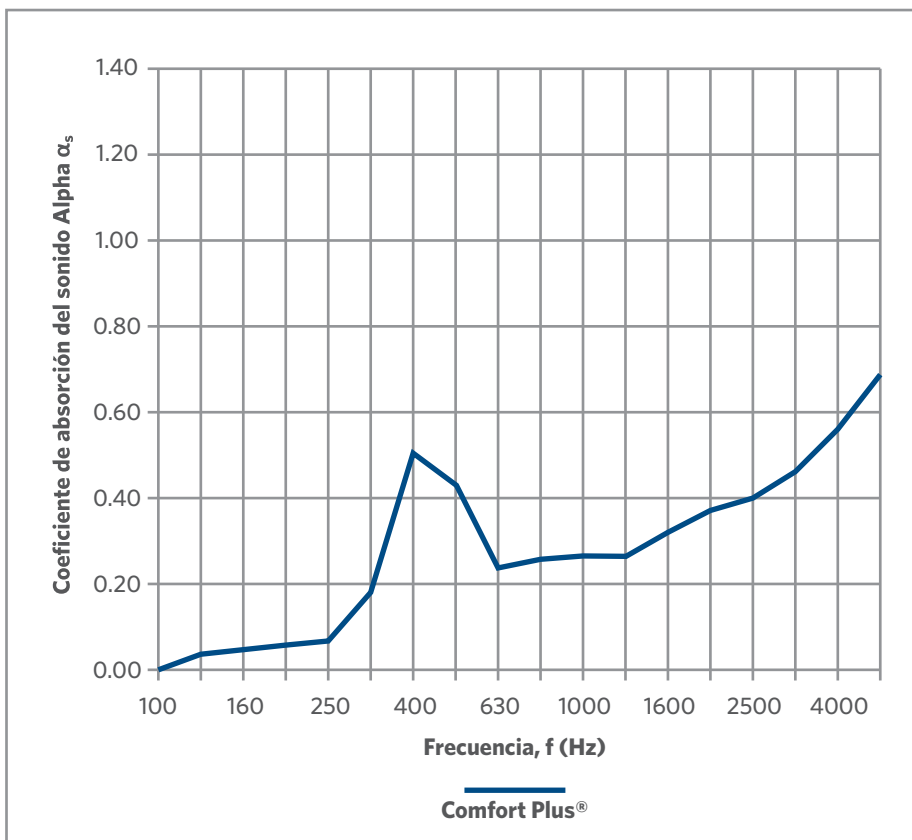

α_p Valores (Comfort Plus®)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.10	0.40	0.25	0.35	0.55

α_w	Clase
(valor global)	
0.30 (H)	D