

LET YOUR MOISTURE WORRIES EVAPORATE.

MOISTURE ISSUES IN SLABS COST AN ESTIMATED
\$1 BILLION/YR IN THE U.S.


Our carpet and resilient flooring can save you time and money, and here's why.

When renovating a building, moisture issues could arise on or below the ground floor of a project but when you choose Milliken product, you can rest assured we've got you covered.

Our carpet comes with WellBAC® open-cell, cushion backing as standard. It is designed to allow floors to breathe and moisture to evaporate.

Our single-step resilient flooring saves time during installation, while avoiding long-term moisture problems.

Milliken.

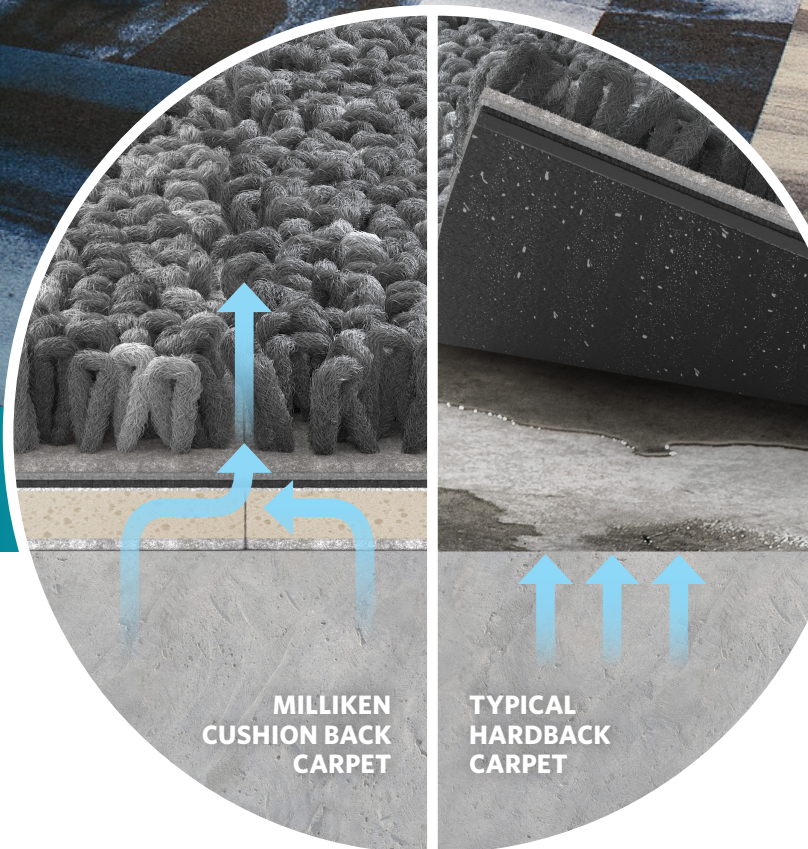

MILLIKEN
CUSHION BACK
CARPET

TYPICAL
HARDBACK
CARPET

With Milliken carpet, moisture vapor can travel freely through our open-cell cushion backing, venting naturally from the seams. Hardback carpet often traps moisture vapor, causing water condensation to form underneath the tiles.

See installation instructions for more details.

Renovation without aggravation.

When your subfloor is substandard, our flooring's got you covered.

Install Milliken LVT and carpet tile without costly moisture mitigation.

No need to apply floor surface primer.

Carpet tile can be installed over old adhesives.


WellBAC® open-cell carpet backing allows floors to breathe and moisture to evaporate.

RENOVATION	CARPET		LVT	
	MILLIKEN CARPET WITH STANDARD ADHESIVE	TYPICAL HARDBACK WITH MOISTURE MITIGATION	MILLIKEN LVT WITH MOISTURE XT ADHESIVE	TYPICAL LVT WITH MOISTURE MITIGATION
INSTALLATION				
Required removal of existing adhesive	NO	YES	YES	YES
Create new concrete surface (Diamond brush, Scarify, Shot blast)	NO	YES	YES	YES
Required Use of Floor Surface Primer	NO	OFTEN	NO	OFTEN
Moisture Mitigation Using 2-Part Epoxy or Membrane Product	NO	YES	NO	YES
TESTING				
Bond Test	YES	YES	YES	YES
RH Test	NO	YES	NO	YES
Measure CaCl (ASTM F-1869) and pH Test	NO	YES	NO	YES
Require intact vapor retarder on-grade or below-grade	NO	YES	NO	YES
Bond Warranty	LIFETIME	TYPICALLY ≤ 10 YEARS	15 YEARS	TYPICALLY ≤ 10 YEARS


Single-step, 1-part adhesive for LVT

Milliken LVT with cost effective Moisture XT trowel-on adhesive creates a durable bond that resists moisture from above or below, protecting from costly moisture issues.

- No pH or RH limits
- No floor priming
- Simple, fast, and easy

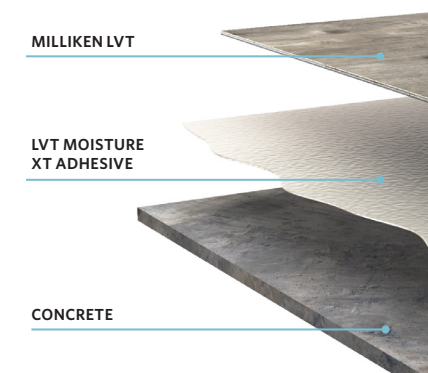

Milliken LVT with Moisture XT is resistant to moisture from below or above.

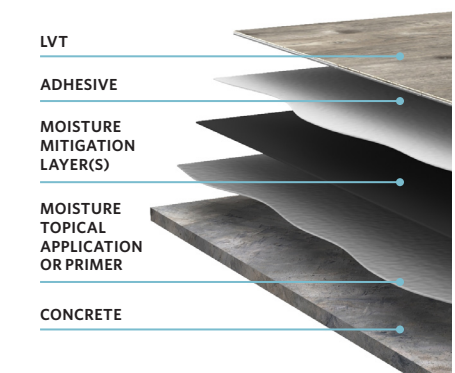

Typical LVT with Moisture Mitigation is costly and often requires priming.

See installation instructions for more details.