


Valores acústicos


NORDIC STORIES / Extreme Contrasts / Hidden Plains / Isograd / Tectonic

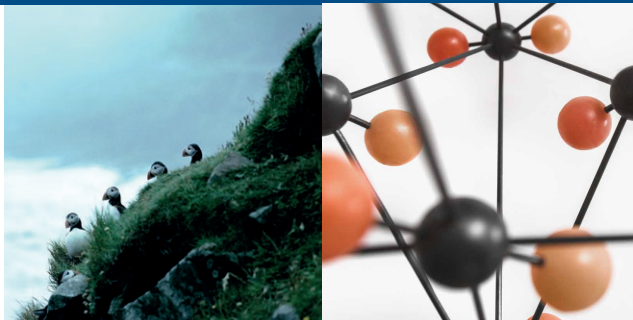

Absorción del sonido (ISO 354)		Impacto del sonido (ISO 140-8 / ISO 10140-3)	
Nordic Stories Almohadillado	α_w 0.25 (H) Clase E	Nordic Stories Almohadillado	ΔL_w 31dB
Nordic Stories Function Plus™	α_w 0.15 (H) Clase E	Nordic Stories Function Plus™	ΔL_w 25dB

Coefficiente de absorción del sonido Alpha α_s

Frecuencia (Hz)	Almohadillado α_s	Function Plus™ α_s
100	-0.01	0.01
125	0.01	0.04
160	0.04	0.01
200	0.03	-0.03
250	0.06	0.03
315	0.10	0.04
400	0.23	0.06
500	0.58	0.07
630	0.31	0.08
800	0.23	0.11
1000	0.22	0.15
1250	0.22	0.26
1600	0.26	0.35
2000	0.28	0.35
2500	0.32	0.33
3150	0.37	0.34
4000	0.39	0.41
5000	0.49	0.44

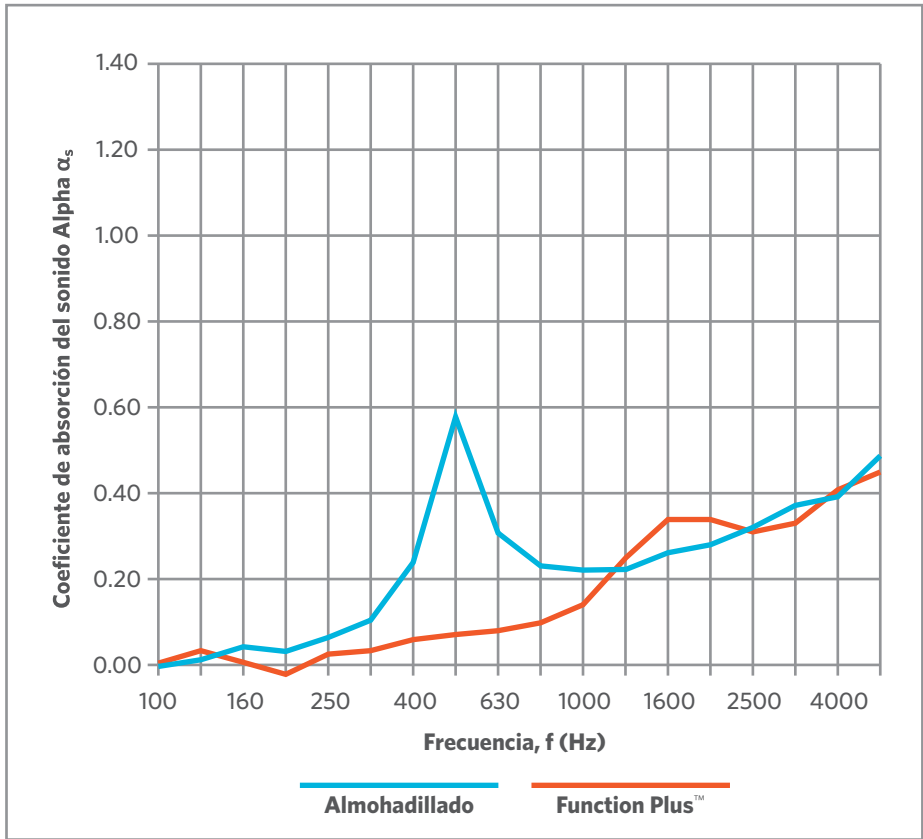

α_p Valores (Almohadillado)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.05	0.35	0.20	0.30	0.40

α_p Valores (Function Plus™)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.00	0.00	0.05	0.15	0.35	0.40

α_w	Clase
(valor global)	
0.25 (H)	E

α_w	Clase
(valor global)	
0.15 (H)	E

