




OptiCell™ Edge

32 mm Flexible Innerduct System

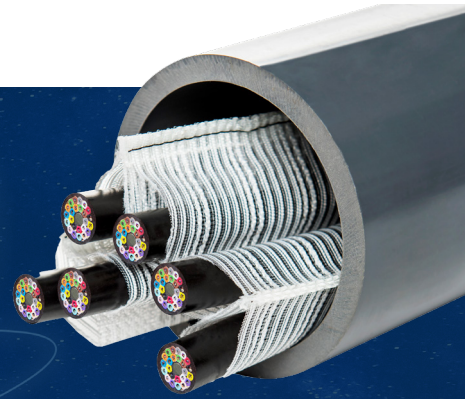

OptiCell™ Edge innerduct is a flexible fabric system designed specifically for increasing conduit capacity. The unique textile construction allows OptiCell™ innerduct to conform to the shape of cables placed within, greatly reducing wasted space and increasing cable deployment efficiency.

Technical Information

Material Fabric	Warp - Polyester Monofilament Filling - Nylon/Polyester
Pull Tape	High Tenacity Multifilament Polyester core with polyethylene monofilament jacket 5.5 mm 450 kg breaking tensile
Sewing Line	Bonded Polyester
Temperature Range	-30°C to 100°C
Lubricate	100% Silicon Oil
Breaking Tensile	3-Cell > 800 kg 2-Cell > 500 kg 1-Cell > 300 kg
% Elongation @ 50 kgs	< 3%
Melting Point	>215°C
Thermal Expansion	8.4 mm/100 m/ 5°C
Reel Length	1000 m (Standard) Min 500 m/Max 6300 (3-cell)
Chemical Resistance	Resistance to ground chemicals and petroleum products

Key Features

- Configurations in 1, 2, and 3-cells available for all products
- Pre-installed MaxGlide rope is standard
- Pre-lubricated for lower pulling tensions

STANDARD

EDGE 3212-1	1-Cell Standard
EDGE 3212-2	2-Cell Standard
EDGE 3212-3	3-Cell Standard

APPLICATION

Minimum Duct/Conduit ID (3-cell): 30 mm
Maximum cable diameter for each cell: 12 mm
See Design Manual for Overlay and Multiple packs installation.

ACCESSORIES

Milliken Pull Tapes (Standard)	
MT565-xx	12 mm Pull Tape
MT815-xx	16 mm Pull Tape
MT1135-xx	20 mm Pull Tape
Milliken Pull Tapes (Detectable)	
DT565-xx	12 mm Pull Tape
DT815-xx	16 mm Pull Tape
DT1135-xx	20 mm Pull Tape

TOOLS FOR INSTALLATION

Swivel	Pull Tape	Vinyl Tape
Scissors	Extra Lubricant	Cable Grip

- x Designate color of thread RD (Red), BK (Black), BL (Blue), L (Yellow), GR (Green)
- xx Designate spool length 1000 (1000 m spool), 1500 (1500 m spool)

The information contained in this document is subject to change without notice.

For more information, email opticell@milliken.com

© Copyright 2022 Milliken & Company, All rights reserved. Milliken is a registered trademark of Milliken & Company.