

Milliken® Hyperform® HPN® 68L

High-Performance Additive for Polypropylene

Hyperform® HPN® 68L is a performance additive designed for use with polypropylene (PP) homopolymers and is ideal for use in automotive, appliances, caps and closures injection molding.

Hyperform HPN 68L Attributes

- Extremely fast polymer crystallization speed
- Isotropic shrinkage for reduced warpage and high productivity
- Overriding nucleation power

Typical Applications


Automotive, appliances, material handling, caps and closures

Productivity and Quality Improvements

Thermal Performance


Peak Crystallization Temperature (T_c)

Higher peak crystallization temperatures allow quality parts to be produced with decreased cooling times.

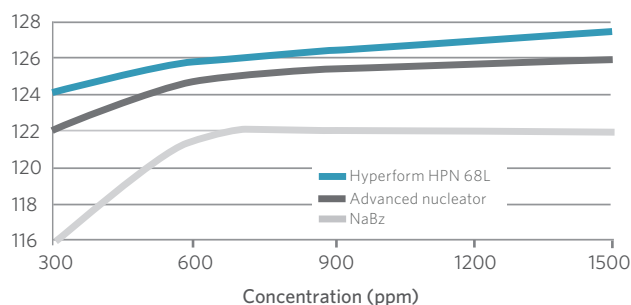


Isothermal Crystallization Half-Time

Shorter halftimes allow quality parts to be produced with decreased cooling times.

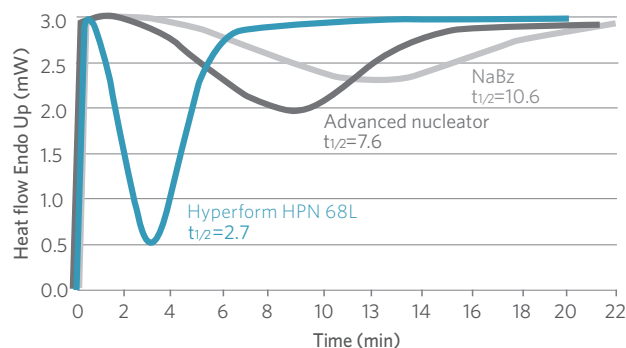

Typical Productivity Results

The addition of Hyperform HPN 68L to a polypropylene resin allows a processor to make the highest quality parts at the fastest possible production rates.

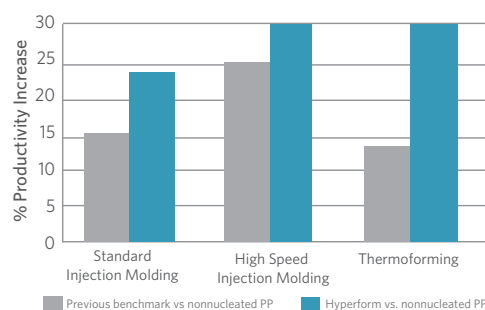

Typical Quality Improvements

Hyperform HPN 68L has dramatically improved part quality in numerous field trials. This includes the elimination of:

Warpage | Sink marks | Ejection pin marks
Voids | Deformations during mold release



Hyperform® HPN® 68L

High-Performance Additive
for Polypropylene




Isotropic Shrinkage and Quality Improvements

Resins containing HPN 68L provide improved isotropy and can help improve part quality, warpage and cycle time.

Case Study – Door Panels

- Process: Injection molding
- Resin: 20 MFR Impact Copolymer PP
- Formulations: Control Conventional Nucleator (1000 ppm) Advanced Nucleator (600 ppm) Hyperform HPN 68L (600 ppm)

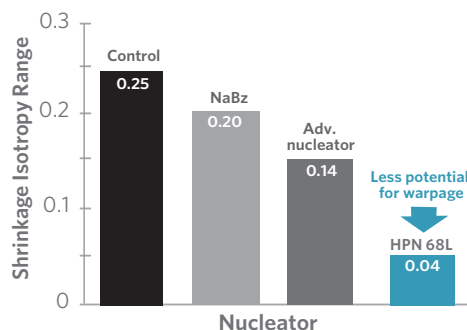


Overriding Nucleation Effect in Pigmented Systems

Hyperform HPN 68L can be added to pigment formulations and will override color-to-color variation in crystallization temperature and shrinkage, reducing the need to make color-specific machine adjustments and to maximize production.

Case Study – Caps and Closures

- Process: Injection Molding
- Resin: 20 MFR Homopolymer
- Formulations: Various commercial pigments and Hyperform HPN 68L

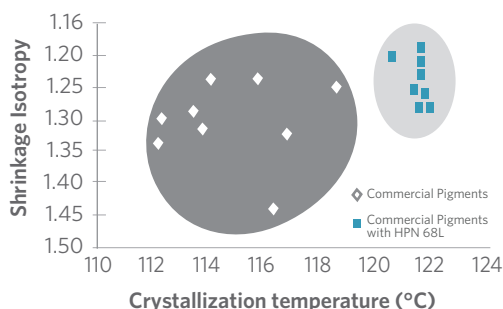


Nucleation Effect in Filled Systems

Hyperform HPN 68L is compatible with filled PP systems including talc, calcium carbonate, and glass filled polypropylene.

Case Study – Appliance Parts

- Process: Injection molding
- Resin: 20% Talc filled HP
- Formulations: Base resin, Base resin and Hyperform HPN 68L (500 ppm)

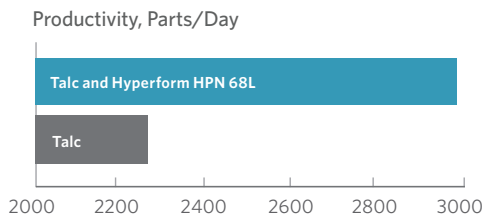

Previous Benchmark **Hyperform HPN 68L**

Please contact your Milliken representative for any additional information.

PLEASE NOTE: As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at www.milliken.com/terms (all additional/different terms are rejected) unless explicitly agreed otherwise in a signed writing.

NORTH AMERICA
Spartanburg, SC, USA
Tel: 800-910-5592
Fax: 864-503-2430
millichem@milliken.com

EUROPE
Gent, Belgium
Tel: 32-9-265-1100
Fax: 32-9-265-1195
eurochem@milliken.com

LATIN AMERICA
Sao Paulo, Brazil
Tel: 55-11-3043-7942
Fax: 55-11-3043-7096
lachem@milliken.com

LATIN AMERICA
Mexico City, Mexico
Tel: 52-55-3088 3600
Fax: 52-55-9000 2643
lachem@milliken.com

ASIA
Singapore
Tel: 65-6377-0770
Fax: 65-6377-0990
asiachem@milliken.com

ASIA
Shanghai
Tel: 86-21 6145-5555
Fax: 86-21 6145-5558
asiachem@milliken.com

ASIA
Pune, India
Tel: 91.20.6730.7501
Fax: 91.20.6730.7514
asiachem@milliken.com