

Milliken®

Tegris® Spacer Liners


Give your rubber the Tegriss® experience

Tegriss® profile liners stand up to your most demanding requirements and pass the test of time.

Milliken created a super rigid cassette liner, which can be equipped with rubber spacers. The spacers allow the cassette liner to carry very sticky and shape sensitive tread and sidewall compounds and present them directly to the tire building machine, without any deformation.

Benefits

- Designed for cassette applications allowing a continuous and fully automated tire building process.
- Equipped with rubber spacers to prevent crushing of profiled rubber parts.
- Super stiff in both directions to handle heavy rubber parts and prevents wrinkles.
- Clean release for standard and tacky rubber compounds.
- Significantly extended service life.
- Increased productivity per tire building machine.
- Increased tire uniformity.
- Fully tailor-made accord. customer's requirements.
- Non-Breathable

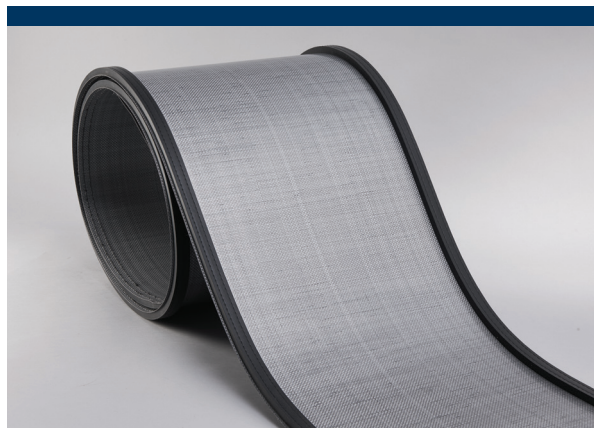

Comparative Data

		Stiffness W g force	Stiffness F g force	Weight g/sqm	Thickness mm
PP/PET Stiff Liner	PP-1808	208	3795	255	0.69
	PET-280	349	4159	280	0.51
	PET-475	375	10766	475	0.64
Tegriss Spacer Liner	Tegriss® -500	30373	28487	510	0.63
Test Method		ASTM D6828 modified	ASTM D6828 modified	ASTM D3776	ASTM D1777



Europe

Milliken Textiles BVBA
Ham 24
9000 Ghent
Belgium
Tel: (+32) 9 265 1071
email: trgeurope@milliken.com

Asia

Milliken Chemical & Textile
(India) Company Pvt Ltd
Bommasandra - Jigani Link Road
Bangalore - 560105, India
Tel: (+91) 924 360 4689
email: trgasia@milliken.com

USA

Milliken & Company
920 Milliken Road
Spartanburg, SC, USA 29303
Tel: (+01) 864 503 2574
email: trgamericas@milliken.com

Milliken™
reinforcements.milliken.com